



# Release Notes

FortiAnalyzer 7.6.1



**FORTINET DOCUMENT LIBRARY**

<https://docs.fortinet.com>

**FORTINET VIDEO LIBRARY**

<https://video.fortinet.com>

**FORTINET BLOG**

<https://blog.fortinet.com>

**CUSTOMER SERVICE & SUPPORT**

<https://support.fortinet.com>

**FORTINET TRAINING & CERTIFICATION PROGRAM**

<https://www.fortinet.com/training-certification>

**FORTINET TRAINING INSTITUTE**

<https://training.fortinet.com>

**FORTIGUARD LABS**

<https://www.fortiguard.com>

**END USER LICENSE AGREEMENT**

<https://www.fortinet.com/doc/legal/EULA.pdf>

**FEEDBACK**

Email: [techdoc@fortinet.com](mailto:techdoc@fortinet.com)



October 24, 2024

FortiAnalyzer 7.6.1 Release Notes

05-761-1088127-20241024

# TABLE OF CONTENTS

<b>Change Log</b>	<b>6</b>
<b>FortiAnalyzer 7.6.1 Release</b>	<b>7</b>
Supported models	7
FortiAnalyzer VM subscription license	7
Management extension applications	8
Supported models for MEA	8
Minimum system requirements	8
<b>Special Notices</b>	<b>10</b>
The "siemdb" daemon may fail to start on a FortiAnalyzer 7.6.0/7.6.1 VM	10
Log insertion interruption when upgrading from 7.40/7.4.1 to 7.6.0/7.6.1	12
Migrating the log database from Postgres to ClickHouse	12
Shell access has been removed	13
FortiSOAR MEA license must be activated or uploaded	13
Alert notifications generated by FortiAnalyzer and sent by syslog	13
Additional configuration required for SSO users	13
FortiAnalyzer 7.2.3 and later firmware on FortiGuard	13
Configuration backup requires a password	14
FortiAnalyzer-3500E support	14
Serial console has changed for FortiAnalyzer deployments on Xen	15
OpenXen in PV mode is not supported in FortiAnalyzer 7.4.1	15
Default GUI theme changed	15
Management Extensions visibility in the GUI	15
FortiManager Features removed	15
Setup wizard requires FortiCare registration	15
Hyperscale firewall mode	16
Modifying the interface status with the CLI	16
Citrix XenServer default limits and upgrade	16
FortiAnalyzer VM upgrade requires more memory	17
Maximum ADOM limits for FortiAnalyzer	17
Port 8443 reserved	17
Hyper-V FortiAnalyzer-VM running on an AMD CPU	17
SSLv3 on FortiAnalyzer-VM64-AWS	18
<b>Upgrade Information</b>	<b>19</b>
Downgrading to previous firmware versions	19
Firmware image checksums	19
FortiAnalyzer VM firmware	19
SNMP MIB files	21
<b>Product Integration and Support</b>	<b>22</b>
Supported software	22
Web browsers	23
FortiOS and FortiOS Carrier	23

FortiADC .....	23
FortiAnalyzer .....	24
FortiAuthenticator .....	24
FortiCache .....	24
FortiCASB .....	24
FortiClient .....	24
FortiDDoS .....	24
FortiDeceptor .....	25
FortiFirewall and FortiFirewallCarrier .....	25
FortiIsolator .....	25
FortiMail .....	25
FortiManager .....	25
FortiNAC .....	26
FortiNDR .....	26
FortiPAM .....	26
FortiProxy .....	26
FortiSandbox .....	26
FortiSASE .....	27
FortiSOAR .....	27
FortiSwitch ATCA .....	27
FortiToken .....	27
FortiWeb .....	27
Virtualization .....	27
Feature support .....	28
Language support .....	29
Supported models .....	30
FortiGate models .....	30
FortiGate special branch models .....	36
FortiCarrier models .....	39
FortiCarrier special branch models .....	42
FortiADC models .....	44
FortiAnalyzer models .....	44
FortiAuthenticator models .....	45
FortiCache models .....	45
FortiDDoS models .....	45
FortiDeceptor models .....	46
FortiFirewall models .....	46
FortiFirewallCarrier models .....	47
FortiIsolator models .....	48
FortiMail models .....	48
FortiNAC models .....	48
FortiNDR models .....	48
FortiPAM models .....	49
FortiProxy models .....	49
FortiSandbox models .....	49
FortiSOAR models .....	50
FortiSwitch ATCA models .....	50
FortiWeb models .....	50

---

<b>Resolved Issues</b>	<b>51</b>
<b>Known issues</b>	<b>52</b>
New known issues	52
Existing known issues	52
Fabric View	52
FortiView	52
Log View	53
Others	53
Reports	53
System Settings	54
<b>Appendix A - Default and maximum number of ADOMs supported</b>	<b>55</b>
Hardware models	55
Virtual Machines	56
FortiAnalyzer subscription license	56
FortiAnalyzer perpetual license	56

# Change Log

Date	Change Description
2024-10-24	Initial release of 7.6.1.

# FortiAnalyzer 7.6.1 Release

This document provides information about FortiAnalyzer version 7.6.1 build 3344.



The recommended minimum screen resolution for the FortiAnalyzer GUI is 1920 x 1080. Please adjust the screen resolution accordingly. Otherwise, the GUI may not display properly.

This section includes the following topics:

- [Supported models on page 7](#)
- [FortiAnalyzer VM subscription license on page 7](#)
- [Management extension applications on page 8](#)

## Supported models

FortiAnalyzer version 7.6.1 supports the following models:

<b>FortiAnalyzer</b>	FAZ-150G, FAZ-300F, FAZ-300G, FAZ-400E, FAZ-800F, FAZ-800G, FAZ-810G, FAZ-1000F, FAZ-1000G, FAZ-2000E, FAZ-3000F, FAZ-3000G, FAZ-3100G, FAZ-3500F, FAZ-3500G, FAZ-3510G, FAZ-3700F, and FAZ-3700G.
<b>FortiAnalyzer VM</b>	FAZ_DOCKER, FAZ_VM64, FAZ_VM64_ALI, FAZ_VM64_AWS, FAZ_VM64_AWSOnDemand, FAZ_VM64_Azure, FAZ_VM64_GCP, FAZ_VM64_HV (including Hyper-V 2016, 2019, and 2022), FAZ_VM64_IBM, FAZ_VM64_KVM, FAZ_VM64_OPC, FAZ_VM64_XEN (for both Citrix and Open Source Xen).



FAZ-300F supports the subscription license for the SOC service. However performance may be impacted because FAZ-300F has fewer resources and a smaller CPU than other FortiAnalyzer models that support the SOC service.

## FortiAnalyzer VM subscription license

The FortiAnalyzer VM subscription license supports FortiAnalyzer version 6.4.1 and later. For information about supported firmware, see [FortiAnalyzer VM firmware on page 19](#).

See also [Appendix A - Default and maximum number of ADOMs supported on page 55](#).



You can use the FortiAnalyzer VM subscription license with new FortiAnalyzer-VM installations.

For existing FortiAnalyzer-VM installations, you can migrate to a FortiAnalyzer VM subscription license, starting with FortiAnalyzer 7.0.1. See the [FortiAnalyzer Administration Guide](#).

## Management extension applications

The following section describes supported models and minimum system requirements for management extension applications (MEA) in FortiAnalyzer 7.6.1.



FortiAnalyzer uses port TCP/443 or TCP/4443 to connect to the Fortinet registry and download MEAs. Ensure that the port is also open on any upstream FortiGates. For more information about incoming and outgoing ports, see the [7.6 Ports Guide](#).

As of FortiAnalyzer 7.4.0, the *Management Extensions* pane is only visible in the GUI when docker status is enabled and at least one MEA is enabled and downloaded. For more information about enabling and using the MEAs, see the Management Extensions documentation in the [FortiAnalyzer Documents Library](#).

## Supported models for MEA

You can use any of the following FortiAnalyzer models as a host for management extension applications:

<b>FortiAnalyzer</b>	FAZ-3000F, FAZ-3000G, FAZ-3100G, FAZ-3500F, FAZ-3500G, FAZ-3510G, FAZ-3700F, and FAZ-3700G.
<b>FortiAnalyzer VM</b>	FAZ_VM64, FAZ_VM64_ALI, FAZ_VM64_AWS, FAZ_VM64_AWSOnDemand, FAZ_VM64_Azure, FAZ_VM64_GCP, FAZ_VM64_HV (including Hyper-V 2016, 2019, and 2022), FAZ_VM64_IBM, FAZ_VM64_KVM, FAZ_VM64_OPC, FAZ_VM64_XEN (for both Citrix and Open Source Xen).

## Minimum system requirements

By default FortiAnalyzer VMs use the following system resource settings:

- 4 vCPU
- 16 GB RAM
- 500 GB disk space

Starting with FortiAnalyzer 7.0.0, RAM and CPU is capped at 50% for MEAs. (Use the `config system docker` command to view the setting.) If FortiAnalyzer has 8 CPUs and 16 GB RAM, then only 4 CPUs and 8 GB RAM are available to MEAs by default, and the 4 CPUs and 8 GB RAM are used for all enabled MEAs.



Some MEAs have minimum system requirements that require you to increase system resources. The following table identifies the minimum requirements for each MEA as well as the recommended system resources to function well in a production environment.

MEA minimum system requirements apply only to the individual MEA and do not take into consideration any system requirements for resource-sensitive FortiAnalyzer features or multiple, enabled MEAs.

Management Extension Application	Minimum system requirements	Recommended system resources for production*
<b>FortiSIEM</b>	<ul style="list-style-type: none"><li>• 4 vCPU</li><li>• 4 GB RAM</li><li>• No change for disk storage</li></ul>	<ul style="list-style-type: none"><li>• 12 vCPU</li><li>• 16 GB RAM</li><li>• 500 GB</li></ul>
<b>FortiSOAR</b>	<ul style="list-style-type: none"><li>• 4 vCPU</li><li>• 8 GB RAM</li><li>• 500 GB disk storage</li></ul>	<ul style="list-style-type: none"><li>• 16 vCPU</li><li>• 64 GB RAM</li><li>• No change for disk storage</li></ul>

\*The numbers in the *Recommended system resources for production* column are a combination of the default system resource settings for FortiAnalyzer plus the recommended system requirements for the MEA.

# Special Notices

This section highlights some of the operational changes that administrators should be aware of in FortiAnalyzer version 7.6.1.

## The "siemdb" daemon may fail to start on a FortiAnalyzer 7.6.0/7.6.1 VM

The "siemdb" daemon may fail to start on a FortiAnalyzer VM running version 7.6.0/7.6.1, which can prevent log migration from completing. This issue may occur due to inconsistencies in the number of CPUs reported by the system during initialization. Certain CPU-related settings might trigger this problem.

Please review the following scenarios and their proposed workarounds.

### ESXi platform:

Enabling the *CPU Hot Add* feature in ESXi can lead to this issue. As a workaround, disabling the *CPU Hot Add* feature may resolve the problem.

Virtual Hardware VM Options

Add hard disk Add network adapter Add other device

**CPU** 8 ⓘ

Cores per Socket 1 Sockets: 8

CPU Hot Plug ☐ Enable CPU Hot Add

Reservation None MHz

Limit Unlimited MHz

Shares Normal 1000


Hardware virtualization ☐ Expose hardware assisted virtualization to the guest OS ⓘ

IOMMU ☐ Expose IOMMU to the guest OS

Performance counters


Save Cancel

Alternatively, if the *CPU Hot Add* feature is enabled, ensure that the number of vCPUs assigned to the FortiAnalyzer VM is equal to the maximum number of licensed CPUs on the host.

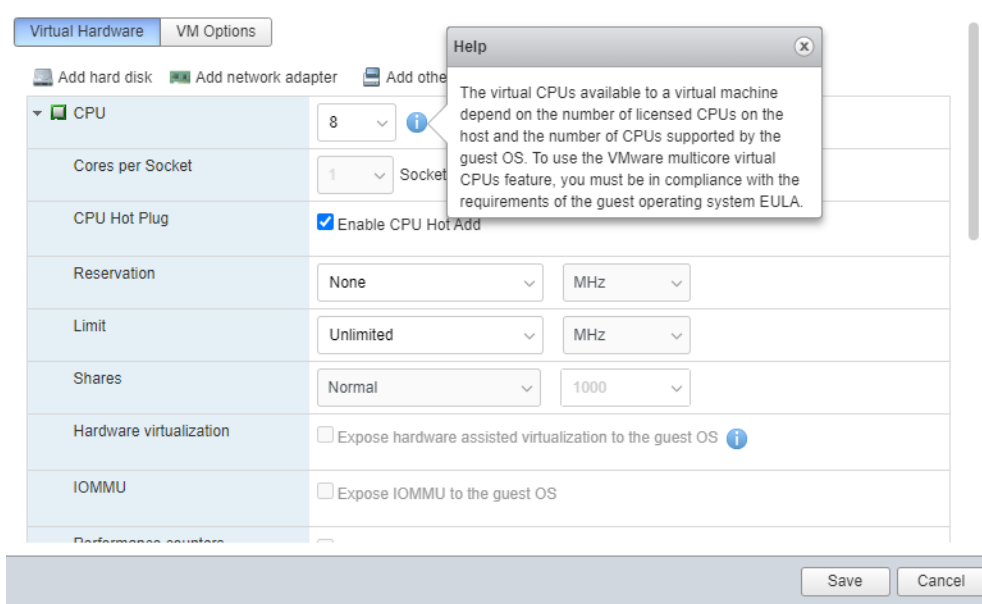


### Xen platform:

Ensure that the maximum number of vCPUs is equal to the initial number of vCPUs allocated.

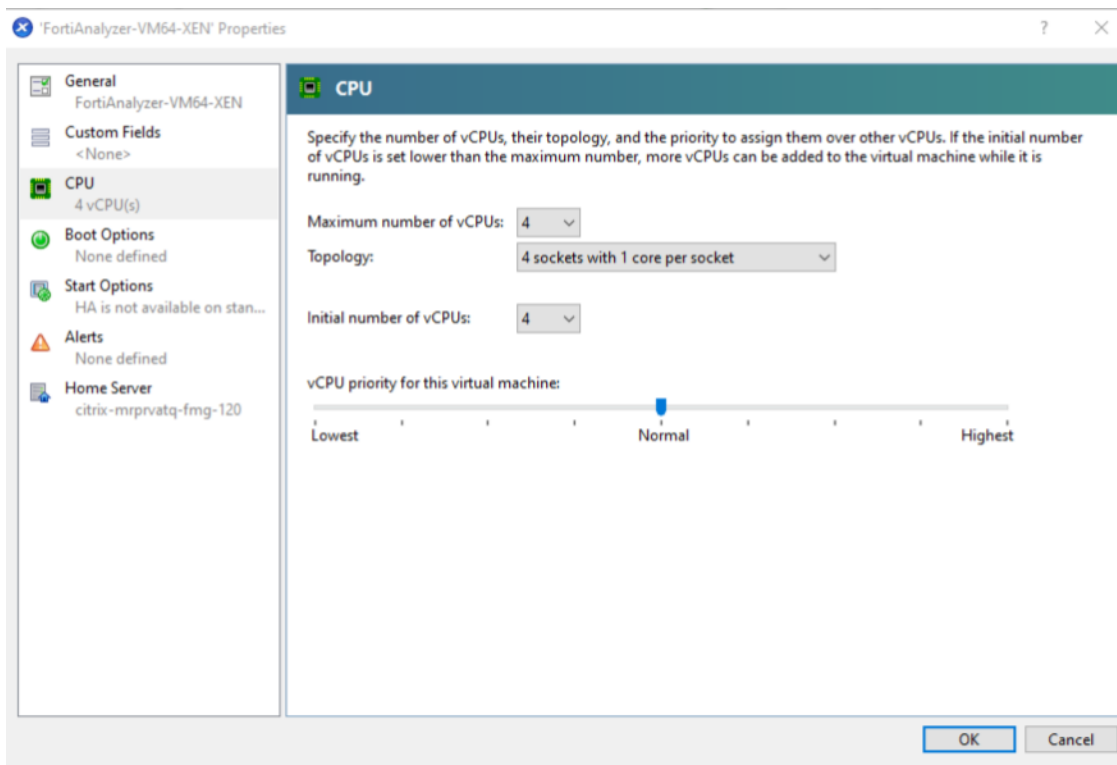

### KVM platform:

Verify that the current CPU allocation matches the maximum CPU allocation for the VM.

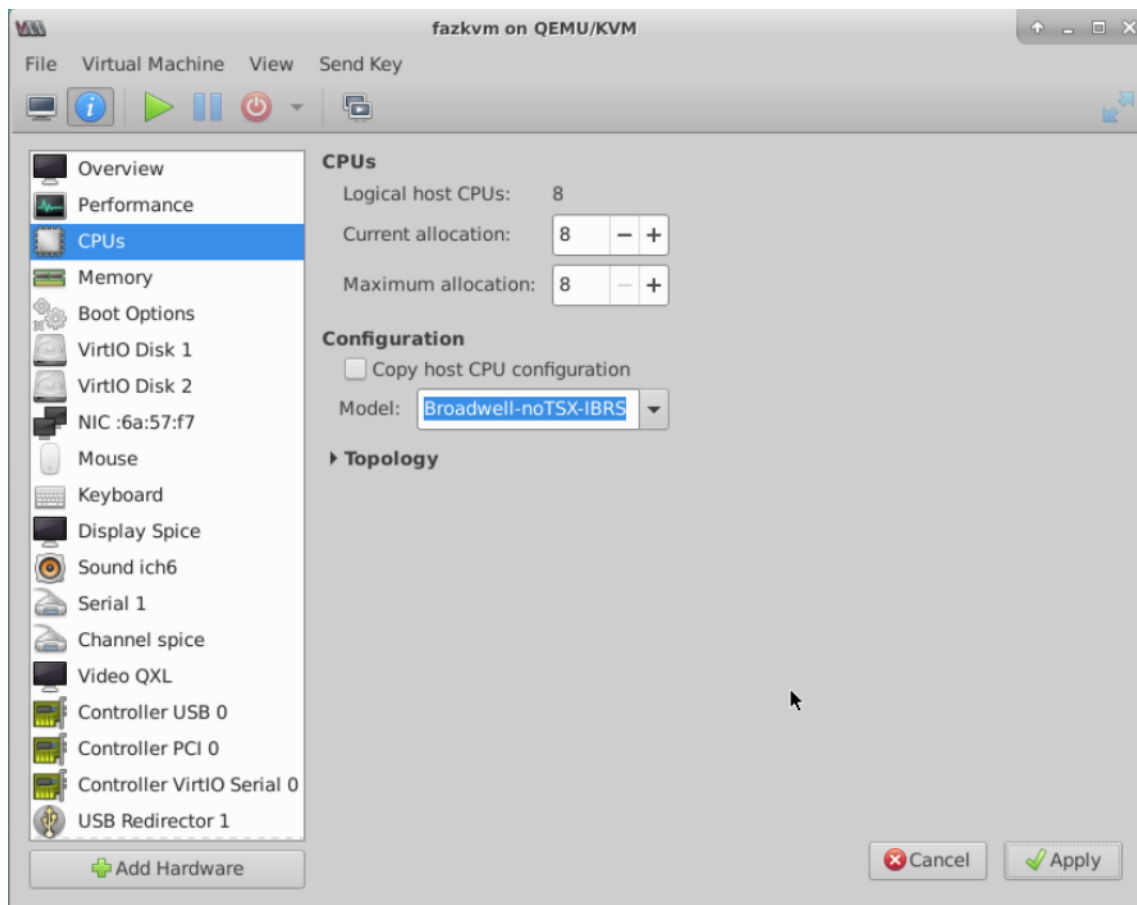

## Log insertion interruption when upgrading from 7.40/7.4.1 to 7.6.0/7.6.1

Log insertion might be interrupted if FortiAnalyzer is upgraded directly from version 7.4.0/7.4.1 to 7.6.0/7.6.1.

To avoid this issue, upgrade to a later FortiAnalyzer 7.4 version (for example, 7.4.2 or 7.4.3) before upgrading to 7.6.0. As a general best practice, Fortinet recommends upgrading to the latest patch version available before upgrading to the next major version.

## Migrating the log database from Postgres to ClickHouse

Beginning in FortiAnalyzer 7.6.0, FortiAnalyzer stores logs in a ClickHouse SQL database rather than a Postgres SQL database.

For more information, see the [FortiAnalyzer 7.6.0 Upgrade Guide](#).

## Shell access has been removed

As of FortiAnalyzer 7.6.0, shell access has been removed.

The following CLI variables have been removed, which were previously used to enable shell access:

```
config system admin setting
    set shell-access {enable | disable}
    set shell-password <passwd>
```

The following CLI command has been removed, which was previously used to access shell when enabled:

```
execute shell
```

## FortiSOAR MEA license must be activated or uploaded

In previous versions, the trial license was automatically activated when the FortiSOAR MEA was enabled. Beginning in FortiAnalyzer 7.6.0, which includes the FortiSOAR MEA 7.6.0, you must activate the trial license or upload a license to use the FortiSOAR MEA.

After enabling the FortiSOAR MEA, go to *Management Extensions > FortiSOAR* to activate or upload the license. For more information, see the Management Extensions documentation in the [FortiAnalyzer Document Library](#).

## Alert notifications generated by FortiAnalyzer and sent by syslog

Beginning in 7.4.3, alert notifications generated by FortiAnalyzer and sent by syslog will use the RFC-5424 format.

## Additional configuration required for SSO users

Beginning in 7.4.3, additional configuration is needed for FortiAnalyzer Users declared as wildcard SSO users.

When configuring Administrators as wildcard SSO users, the `ext-auth-accprofile-override` and/or `ext-auth-adom-override` features, under *Advanced Options*, should be enabled if the intent is to obtain the ADOMs list and/or permission profile from the SAML IdP.

## FortiAnalyzer 7.2.3 and later firmware on FortiGuard

Starting in FortiAnalyzer 7.2.1, a setup wizard executes to prompt the user for various configuration steps and registration with FortiCare. During the execution, the FortiAnalyzer unit attempts to communicate with FortiGuard for a list of FortiAnalyzer firmware images currently available on FortiGuard – older and newer.

In the case of FortiAnalyzer 7.2.2, a bug in the GUI prevents the wizard from completing and prevents the user from accessing the FortiAnalyzer unit. The issue has been fixed in 7.2.3 and later and a CLI command has been added to bypass the setup wizard at login time.

```
config system admin setting
    set firmware-upgrade-check disable
end
```

Fortinet has not uploaded FortiAnalyzer 7.2.3 and later firmware to FortiGuard in order to work around the GUI bug, however, the firmware is available for download from the [Fortinet Support website](#).

## Configuration backup requires a password

As of FortiAnalyzer 7.4.2, configuration backup files are automatically encrypted and require you to set a password. The password is required for scheduled backups as well.

In previous versions, the encryption and password were optional.

For more information, see the [FortiAnalyzer Administration Guide](#).

## FortiAnalyzer-3500E support

FortiAnalyzer 7.4.2 and later does not support the FortiAnalyzer-3500E device.

FortiAnalyzer 7.4.2 introduces an upgrade of the OpenSSL library to address known vulnerabilities in the library. As a result, the SSL connection that is setup between the FortiAnalyzer-3500E device and the Google Map server hosted by Fortinet uses a SHA2 (2048) public key length. The certificate stored on the BIOS that is used during the setup of the SSL connection contains a SHA1 public key length, which causes the connection setup to fail. Running the following command shows the key length.

```
FAZ3500E # config system certificate local
(local)# ed Fortinet_Local
(Fortinet_Local)# get
  name : Fortinet_Local
  password : *
  comment : Default local certificate
  private-key :
  certificate :
    Subject: C = US, ST = California, L = Sunnyvale, O = Fortinet, OU = FortiAnalyzer,
             CN = FL3K5E3M15000074, emailAddress = support@fortinet.com
    Issuer: C = US, ST = California, L = Sunnyvale, O = Fortinet, OU = Certificate
            Authority, CN = support, emailAddress = support@fortinet.com
    Valid from: 2015-03-06 16:22:10 GMT
    Valid to: 2038-01-19 03:14:07 GMT
    Fingerprint: FC:D0:0C:8D:DC:57:B6:16:58:DF:90:22:77:6F:2C:1B
    Public key: rsaEncryption (1024 bits)
    Signature: sha1WithRSAEncryption
    Root CA: No
    Version: 3
    Serial Num:
    1e:07:7a
    Extension 1: X509v3 Basic Constraints:
```

```
CA:FALSE
...
(Fortinet_Local) #
```

## Serial console has changed for FortiAnalyzer deployments on Xen

In FortiAnalyzer 7.4.1, the serial console for Xen deployments has changed from hvc0 (Xen specific) to ttyS0 (standard).

## OpenXen in PV mode is not supported in FortiAnalyzer 7.4.1

As of FortiAnalyzer 7.4.1, kernel and rootfs are encrypted. OpenXen in PV mode tries to unzip the kernel and rootfs, but it will fail. Therefore, OpenXen in PV mode cannot be used when deploying or upgrading to FortiAnalyzer 7.4.1. Only HVM (hardware virtual machine) mode is supported for OpenXen in FortiAnalyzer 7.4.1.

## Default GUI theme changed

As of FortiAnalyzer 7.4.1, the default GUI theme is *Jade*. The default theme can be changed from *System Settings > Settings*.

## Management Extensions visibility in the GUI

As of FortiAnalyzer 7.4.0, the *Management Extensions* pane is only visible in the GUI when docker status is enabled and at least one management extension application (MEA) is enabled and downloaded. For more information about enabling and using the MEAs, see the Management Extensions documentation in the [FortiAnalyzer Documents Library](#).

## FortiManager Features removed

FortiAnalyzer 7.2.1 and later no longer supports FortiManager Features. If you have FortiManager Features enabled before upgrading to FortiAnalyzer 7.2.1, FortiManager Features will be permanently disabled after upgrading to FortiAnalyzer 7.2.1.

## Setup wizard requires FortiCare registration

Starting in FortiAnalyzer 7.2.1, the FortiAnalyzer Setup wizard requires you to complete the *Register with FortiCare* step before you can access the FortiAnalyzer appliance or VM. Previously the step was optional.

For FortiAnalyzer units operating in a closed environment, contact customer service to receive an entitlement file, and then load the entitlement file to FortiAnalyzer by using the CLI.

When FortiManager is managing FortiAnalyzer in a closed environment, FortiManager contains the FortiAnalyzer contract information, and you can point FortiAnalyzer to FortiManager.

## Hyperscale firewall mode

FortiAnalyzer does not support logs from the following models when they have hyperscale firewall mode and netflow enabled:

- FortiGate-1800F
- FortiGate-1801F
- FortiGate-2600F
- FortiGate-2601F
- FortiGate-4200F
- FortiGate-4201F
- FortiGate-4400F
- FortiGate-4401F

FortiAnalyzer only supports logs when the normal firewall mode with standard FortiGate logging are enabled.

## Modifying the interface status with the CLI

Starting in version 7.0.1, the CLI to modify the interface status has been changed from `up/down` to `enable/disable`.

For example:

```
config system interface
  edit port2
    set status <enable/disable>
  next
end
```

## Citrix XenServer default limits and upgrade

Citrix XenServer limits ramdisk to 128M by default. However the FAZ-VM64-XEN image is larger than 128M. Before updating to FortiAnalyzer 6.4, increase the size of the ramdisk setting on Citrix XenServer.

### To increase the size of the ramdisk setting:

1. On Citrix XenServer, run the following command:  
`xenstore-write /mh/limits/pv-ramdisk-max-size 536,870,912`
2. Confirm the setting is in effect by running `xenstore-ls`.

-----



```
limits = ""
pv-kernel-max-size = "33554432"
pv-ramdisk-max-size = "536,870,912"
boot-time = ""
-----
```

3. Remove the pending files left in `/run/xen/pygrub`.



The ramdisk setting returns to the default value after rebooting.

---

## FortiAnalyzer VM upgrade requires more memory

When upgrading FortiAnalyzer VM units from a previous version to FortiAnalyzer 7.2.2 or higher, the upgrade may fail because of memory allocation. As of FortiAnalyzer 7.2.2, FortiAnalyzer VM requires 16 GB of RAM and 4 CPU.

**Workaround:** Before upgrading FortiAnalyzer VM to FortiAnalyzer 7.2.2, change the memory allocation to 16 GB of RAM.

## Maximum ADOM limits for FortiAnalyzer

FortiAnalyzer hardware devices and VMs display a warning when the maximum number of ADOMs is reached or exceeded. The platform does not enforce the limit; however, adding more ADOMs may affect the performance of the unit. For more details, see [Appendix A - Default and maximum number of ADOMs supported on page 55](#).

## Port 8443 reserved

Port 8443 is reserved for https-logging from FortiClient EMS for Chromebooks. See also [FortiAnalyzer 7.0 Ports Reference](#) on the Docs Library.

## Hyper-V FortiAnalyzer-VM running on an AMD CPU

A Hyper-V FAZ-VM running on a PC with an AMD CPU may experience a kernel panic. Fortinet recommends running VMs on an Intel-based PC.

## SSLv3 on FortiAnalyzer-VM64-AWS

Due to known vulnerabilities in the SSLv3 protocol, FortiAnalyzer-VM64-AWS only enables TLSv1 by default. All other models enable both TLSv1 and SSLv3. If you wish to disable SSLv3 support, please run:

```
config system global
    set ssl-protocol tlsv1
end
```

# Upgrade Information



Prior to upgrading your FortiAnalyzer, please review the FortiAnalyzer Upgrade Guide in detail as it includes all of the necessary steps and associated details required to upgrade your FortiAnalyzer device or VM, including recommended upgrade paths.

See the *FortiAnalyzer Upgrade Guide* in the [Fortinet Document Library](#).

This section contains the following topics:

- [Downgrading to previous firmware versions on page 19](#)
- [Firmware image checksums on page 19](#)
- [FortiAnalyzer VM firmware on page 19](#)
- [SNMP MIB files on page 21](#)

## Downgrading to previous firmware versions

FortiAnalyzer does not provide a full downgrade path. You can downgrade to a previous firmware release by using the GUI or CLI, but doing so results in configuration loss. A system reset is required after the firmware downgrade process has completed. To reset the system, use the following CLI commands via a console port connection:

```
execute reset {all-settings | all-except-ip}  
execute format {disk | disk-ext4 | disk-ext3}
```

## Firmware image checksums

The MD5 checksums for all Fortinet software and firmware releases are available at the Customer Service & Support portal, <https://support.fortinet.com>. After logging in, go to *Download > Firmware Image Checksums*, enter the image file name including the extension, and select *Get Checksum Code*.

## FortiAnalyzer VM firmware

Fortinet provides FortiAnalyzer VM firmware images for Amazon AWS, Amazon AWSOnDemand, Citrix and Open Source XenServer, Linux KVM, Microsoft Hyper-V Server, and VMware ESX/ESXi virtualization environments.

### Amazon Web Services

- The 64-bit Amazon Machine Image (AMI) is available on the AWS marketplace.

### Citrix XenServer and Open Source XenServer

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.OpenXen.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains the QCOW2 file for the Open Source Xen Server.
- `.out.CitrixXen.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains the Citrix XenServer Virtual Appliance (XVA), Virtual Hard Disk (VHD), and OVF files.

### Google Cloud Platform

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.gcp.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation.

### Linux KVM

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.kvm.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation. This package contains QCOW2 that can be used by qemu.

### Microsoft Azure

The files for Microsoft Azure have AZURE in the filenames, for example `<product>_VM64_AZURE-v<number>-build<number>-FORTINET.out.hyperv.zip`.

- `.out`: Download the firmware image to upgrade your existing FortiAnalyzer VM installation.

### Microsoft Hyper-V Server

The files for Microsoft Hyper-V Server have HV in the filenames, for example, `<product>_VM64_HV-v<number>-build<number>-FORTINET.out.hyperv.zip`.

- `.out`: Download the firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.hyperv.zip`: Download the package for a new FortiAnalyzer VM installation. This package contains a Virtual Hard Disk (VHD) file for Microsoft Hyper-V Server.



Microsoft Hyper-V 2016 is supported.

---

### Oracle Private Cloud

- `.out`: Download the 64-bit firmware image to upgrade your existing FortiAnalyzer VM installation.
- `.out.opc.zip`: Download the 64-bit package for a new FortiAnalyzer VM installation.

### VMware ESX/ESXi

- `.out`: Download the 64-bit firmware image to upgrade your existing VM installation.
- `.ovf.zip`: Download either the 64-bit package for a new VM installation. This package contains an Open Virtualization Format (OVF) file for VMware and two Virtual Machine Disk Format (VMDK) files used by the OVF file during deployment.



For more information, see the [FortiAnalyzer Data Sheet](#) available on the Fortinet web site. VM installation guides are available in the [Fortinet Document Library](#).

---

## SNMP MIB files

You can download the *FORTINET-FORTIMANAGER-FORTIANALYZER.mib* MIB file in the firmware image file folder. The Fortinet Core MIB file is located in the main FortiAnalyzer version 5.00 file folder.

# Product Integration and Support

This section lists FortiAnalyzer 7.6.1 support of other Fortinet products. It also identifies what FortiAnalyzer features are supported for managed platforms and what languages FortiAnalyzer supports. It also lists which Fortinet models can be managed by FortiAnalyzer.

The section contains the following topics:

- [Supported software on page 22](#)
- [Feature support on page 28](#)
- [Language support on page 29](#)
- [Supported models on page 30](#)

## Supported software

FortiAnalyzer 7.6.1 supports the following software:

- [Web browsers on page 23](#)
- [FortiOS and FortiOS Carrier on page 23](#)
- [FortiADC on page 23](#)
- [FortiAnalyzer on page 24](#)
- [FortiAuthenticator on page 24](#)
- [FortiCache on page 24](#)
- [FortiCASB on page 24](#)
- [FortiClient on page 24](#)
- [FortiDDoS on page 24](#)
- [FortiDeceptor on page 25](#)
- [FortiFirewall and FortiFirewallCarrier on page 25](#)
- [FortiIsolator on page 25](#)
- [FortiMail on page 25](#)
- [FortiManager on page 25](#)
- [FortiNAC on page 26](#)
- [FortiNDR on page 26](#)
- [FortiPAM on page 26](#)
- [FortiProxy on page 26](#)
- [FortiSandbox on page 26](#)
- [FortiSASE on page 27](#)
- [FortiSOAR on page 27](#)
- [FortiSwitch ATCA on page 27](#)
- [FortiToken on page 27](#)
- [FortiWeb on page 27](#)
- [Virtualization on page 27](#)



To confirm that a device model or firmware version is supported by the current firmware version running on FortiAnalyzer, run the following CLI command:

```
diagnose dvm supported-platforms list
```

---



Always review the Release Notes of the supported platform firmware version before upgrading your device.

---

## Web browsers

FortiAnalyzer 7.6.1 supports the following web browsers:

- Microsoft Edge 114
- Mozilla Firefox version 96
- Google Chrome version 114

Other web browsers may function correctly, but are not supported by Fortinet.

## FortiOS and FortiOS Carrier



The *FortiAnalyzer Release Notes* communicate support for FortiOS versions that are available at the time of the FortiAnalyzer 7.6.1 release. For additional information about other supported FortiOS versions, please refer to the FortiAnalyzer compatibility chart in the [Fortinet Document Library](#).

See [FortiAnalyzer compatibility with FortiOS](#).

---

FortiAnalyzer 7.6.1 supports the following versions of FortiOS and FortiOS Carrier:

- 7.6.0
- 7.4.0 to 7.4.4
- 7.2.0 to 7.2.10
- 7.0.0 to 7.0.15
- 6.4.0 to 6.4.15
- 6.2.0 to 6.2.16

## FortiADC

FortiAnalyzer 7.6.1 supports the following versions of FortiADC:

- 7.4.0 and later
- 7.2.0 and later
- 7.1.0 and later

## FortiAnalyzer

FortiAnalyzer 7.6.1 supports the following versions of FortiAnalyzer:

- 7.4.0 and later
- 7.2.0 and later
- 7.0.0 and later

## FortiAuthenticator

FortiAnalyzer 7.6.1 supports the following versions of FortiAuthenticator:

- 6.6.0 and later
- 6.5.0 and later
- 6.4.0 and later
- 6.3.0 and later

## FortiCache

FortiAnalyzer 7.6.1 supports the following versions of FortiCache:

- 4.2.0 and later
- 4.1.0 and later
- 4.0.0 and later

## FortiCASB

FortiAnalyzer 7.6.1 supports the following versions of FortiCASB:

- 23.2.0 and later

## FortiClient

FortiAnalyzer 7.6.1 supports the following versions of FortiClient:

- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later

When using FortiClient with FortiAnalyzer, it is recommended to upgrade both to their latest versions. The versions between the two products should match. For example, if using FortiAnalyzer 7.2.0, use FortiClient 7.2.0.

## FortiDDoS

FortiAnalyzer 7.6.1 supports the following versions of FortiDDoS:



- 7.0.0 and later
- 6.6.0 and later
- 6.5.0 and later
- 6.4.0 and later

Limited support. For more information, see [Feature support on page 28](#).

## FortiDeceptor

FortiAnalyzer 7.6.1 supports the following versions of FortiDeceptor:

- 5.3.0 and later
- 5.2.0 and later
- 5.1.0 and later
- 5.0.0 and later
- 4.3.0 and later

## FortiFirewall and FortiFirewallCarrier

FortiAnalyzer 7.6.1 supports the following versions of FortiFirewall and FortiFirewallCarrier:

- 7.4.0 and later
- 7.2.0 and later
- 7.0.0 and later
- 6.4.0 and later
- 6.2.0 and later
- 6.0.0 and later

## Fortisolator

FortiAnalyzer 7.6.1 supports the following versions of Fortisolator:

- 2.4.0 and later

## FortiMail

FortiAnalyzer 7.6.1 supports the following versions of FortiMail:

- 7.4.0 and later
- 7.2.0 and later
- 7.0.0 and later

## FortiManager

FortiAnalyzer 7.6.1 supports the following versions of FortiManager:

- 7.4.0 and later
- 7.2.0 and later
- 7.0.0 and later

## FortiNAC

FortiAnalyzer 7.6.1 supports the following versions of FortiNAC:

- 9.4.0 and later
- 9.2.0 and later
- 9.1.0 and later
- 7.4.0 and later
- 7.2.0 and later

## FortiNDR

FortiAnalyzer 7.6.1 supports the following versions of FortiNDR:

- 7.4.0 and later
- 7.2.0 and later
- 7.1.0 and later
- 7.0.0 and later

## FortiPAM

FortiAnalyzer 7.6.1 supports the following versions of FortiPAM:

- 1.1.0 and later
- 1.0.0 and later

## FortiProxy

FortiAnalyzer 7.6.1 supports the following versions of FortiProxy:

- 7.4.0 to 7.4.4
- 7.2.0 to 7.2.11
- 7.0.0 to 7.0.18
- 2.0.0 to 2.0.5
- 1.2.0 to 1.2.13
- 1.1.0 to 1.1.6
- 1.0.0 to 1.0.7

## FortiSandbox

FortiAnalyzer 7.6.1 supports the following versions of FortiSandbox:

- 4.4.0 and later
- 4.2.0 and later
- 4.0.0 and later
- 3.2.0 and later

## FortiSASE

FortiAnalyzer 7.6.1 supports the following versions of FortiSASE:

- 23.2

## FortiSOAR

FortiAnalyzer 7.6.1 supports the following versions of FortiSOAR:

- 7.4.0 and later
- 7.3.0 and later
- 7.2.0 and later

## FortiSwitch ATCA

FortiAnalyzer 7.6.1 supports the following versions of FortiSwitch ATCA:

- 5.2.0 and later
- 5.0.0 and later
- 4.3.0 and later

## FortiToken

FortiAnalyzer 7.6.1 supports the following versions of FortiToken:

- 3.0.0 and later

FortiAnalyzer supports logs from FortiToken Cloud.

## FortiWeb

FortiAnalyzer 7.6.1 supports the following versions of FortiWeb:

- 7.4.0 and later
- 7.2.0 and later
- 7.0.0 and later

## Virtualization

FortiAnalyzer 7.6.1 supports the following virtualization software:

**Public Cloud**

- Amazon Web Service AMI, Amazon EC2, Amazon EBS
- Alibaba Cloud
- Google Cloud Platform
- IBM Cloud
- Microsoft Azure
- Oracle Cloud Infrastructure

**Private Cloud**

- Citrix XenServer 7.2
- OpenSource XenServer 4.2.5
- Microsoft Hyper-V Server 2016, 2019, and 2022
- Nutanix
  - AHV 20220304 and later
  - AOS 6.5 and later
  - NCC 4.6 and later
  - LCM 3.0 and later
- RedHat 9.1
  - Other versions and Linux KVM distributions are also supported
- VMware ESXi versions 6.5 and later

## Feature support

The following table lists FortiAnalyzer feature support for log devices.

Platform	Log View	FortiView	Event Management	Reports
FortiGate	✓	✓	✓	✓
FortiCarrier	✓	✓	✓	✓
FortiADC	✓		✓	✓
FortiAnalyzer	✓		✓	
FortiAuthenticator	✓			
FortiCache	✓		✓	✓
FortiClient registered to FortiGate	✓	✓		✓
FortiClient registered to FortiClient EMS	✓	✓		✓

Platform	Log View	FortiView	Event Management	Reports
FortiDDoS	✓	✓	✓	✓
FortiDeceptor	✓			
FortiFirewall	✓	✓	✓	✓
FortiMail	✓		✓	✓
FortiManager	✓		✓	
FortiNAC	✓			
FortiNDR	✓	✓	✓	✓
FortiProxy	✓	✓	✓	✓
FortiSandbox	✓		✓	✓
FortiSOAR	✓		✓	✓
FortiWeb	✓		✓	✓
Syslog	✓		✓	✓

## Language support

The following table lists FortiAnalyzer language support information.

Language	GUI	Reports
English	✓	✓
Chinese (Simplified)	✓	✓
Chinese (Traditional)	✓	✓
French	✓	✓
Hebrew		✓
Hungarian		✓
Japanese	✓	✓
Korean	✓	✓
Portuguese		✓
Russian		✓
Spanish		✓

To change the FortiAnalyzer language setting, go to *System Settings > Admin > Admin Settings*, in *Administrative Settings > Language* select the desired language on the drop-down menu. The default value is *Auto Detect*.

Russian, Hebrew, and Hungarian are not included in the default report languages. You can create your own language translation files for these languages by exporting a predefined language from FortiAnalyzer, modifying the text to a different language, saving the file as a different language name, and then importing the file into FortiAnalyzer. For more information, see the *FortiAnalyzer Administration Guide*.

## Supported models

The following tables list which FortiGate, FortiCarrier, FortiDDoS, FortiAnalyzer, FortiMail, FortiSandbox, FortiSwitch ATCA, FortiWeb, FortiCache, FortiProxy, and FortiAuthenticator models and firmware versions that can be managed by a FortiManager or send logs to a FortiManager running version 7.6.1.



Software license activated LENC devices are supported, if their platforms are in the supported models list. For example, support of FG-3200D indicates support of FG-3200D-LENC.

---

This section contains the following topics:

- [FortiGate models on page 30](#)
- [FortiGate special branch models on page 36](#)
- [FortiCarrier models on page 39](#)
- [FortiCarrier special branch models on page 42](#)
- [FortiADC models on page 44](#)
- [FortiAnalyzer models on page 44](#)
- [FortiAuthenticator models on page 45](#)
- [FortiCache models on page 45](#)
- [FortiDDoS models on page 45](#)
- [FortiDeceptor models on page 46](#)
- [FortiFirewall models on page 46](#)
- [FortiFirewallCarrier models on page 47](#)
- [FortiIsolator models on page 48](#)
- [FortiMail models on page 48](#)
- [FortiNAC models on page 48](#)
- [FortiNDR models on page 48](#)
- [FortiPAM models on page 49](#)
- [FortiProxy models on page 49](#)
- [FortiSandbox models on page 49](#)
- [FortiSOAR models on page 50](#)
- [FortiSwitch ATCA models on page 50](#)
- [FortiWeb models on page 50](#)

## FortiGate models

The following FortiGate models are released with FortiOS firmware. For information about supported FortiGate models on special branch releases of FortiOS firmware, see [FortiGate special branch models on page 36](#).

Model	Firmware Version
<b>FortiGate:</b> FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60F, FortiGate-61F, FortiGate-70F, FortiGate-71F, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-100F, FortiGate-101F, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300E, FortiGate-301E, FortiGate-400E, FortiGate-400F, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-401F, FortiGate-500E, FortiGate-501E, FortiGate-600E, FortiGate-600F, FortiGate-601E, FortiGate-601F, FortiGate-800D, FortiGate-900D, FortiGate-900G, FortiGate-901G, FortiGate-1000D, FortiGate-1000F, FortiGate-1001F, FortiGate-1100E, FortiGate-1101E, FortiGate-1800F, FortiGate-1801F, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-2600F, FortiGate-2601F, FortiGate-3000D, FortiGate-3000F, FortiGate-3001F, FortiGate-3100D, FortiGate-3200D, FortiGate-3200F, FortiGate-3201F, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3500F, FortiGate-3501F, FortiGate-3600E, FortiGate-3600E-DC, FortiGate-3601E, FortiGate-3700D, FortiGate-3700F, FortiGate-3701F, FortiGate-3960E, FortiGate-3980E, FortiGate-4200F, FortiGate-4201F, FortiGate-4400F, FortiGate-4401F, FortiGate-4800F, FortiGate-4801F <b>FortiGate 5000 Series:</b> FortiGate-5001E, FortiGate-5001E1 <b>FortiGate 6000 Series:</b> FortiGate-6000F, FortiGate-6001F, FortiGate-6300F, FortiGate-6300F-DC, FortiGate-6301F, FortiGate-6301F-DC, FortiGate-6500F, FortiGate-6500F-DC, FortiGate-6501F, FortiGate-6501F-DC <b>FortiGate 7000 Series:</b> FortiGate-7000E, FortiGate-7000F, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E, FortiGate-7060E-8-DC, FortiGate-7081F, FortiGate-7081F-DC, FortiGate-7081F-2-DC, FortiGate-7121F, FortiGate-7121F-2, FortiGate-7121F-2-DC, FortiGate-7121F-DC <b>FortiGate DC:</b> FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1800F-DC, FortiGate-1801F-DC, FortiGate-2201E-ACDC, FortiGate-2600F-DC, FortiGate-2601F-DC, FortiGate-3000D-DC, FortiGate-3000F-ACDC, FortiGate-3000F-DC, FortiGate-3001F-ACDC, FortiGate-3001F-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3700D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC, FortiGate-4200F-DC, FortiGate-4201F-DC, FortiGate-4400F-DC, FortiGate-4401F-DC, FortiGate-4800F-DC, FortiGate-4801F-DC <b>FortiWiFi:</b> FWF-40F, FWF-40F-3G4G, FWF-60F, FWF-61F, FWF-80F-2R, FWF-81F-2R, FWF-80F-2R-3G4G-DSL, FWF-81F-2R-3G4G-DSL, FWF-81F-2R-3G4G-POE, FWF-81F-2R-POE <b>FortiGate VM:</b> FortiGate-ARM64-AWS, FortiGate-ARM64-Azure, FortiGate-ARM64-GCP, FortiGate-ARM64-KVM, FortiGate-ARM64-OCI, FortiGate-VM64, FortiGate-VM64-AWS, FortiGate-VM64-Azure, FortiGate-VM64-GCP, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-Xen <b>FortiGate Rugged:</b> FGR-60F, FGR-60F-3G4G, FGR-70F, FGR-70F-3G4G	7.6

Model	Firmware Version
<b>FortiGate:</b> FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-70F, FortiGate-71F, FortiGate-80E, FortiGate-80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-DSL, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-100F, FortiGate-101F, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300E, FortiGate-301E, FortiGate-400E, FortiGate-400F, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-401F, FortiGate-500E, FortiGate-501E, FortiGate-600E, FortiGate-600F, FortiGate-601E, FortiGate-601F, FortiGate-800D, FortiGate-900D, FortiGate-900G, FortiGate-901G, FortiGate-1000D, FortiGate-1000F, FortiGate-1001F, FortiGate-1100E, FortiGate-1101E, FortiGate-1500D, FortiGate-1500DT, FortiGate-1800F, FortiGate-1801F, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-2600F, FortiGate-2601F, FortiGate-3000D, FortiGate-3000F, FortiGate-3001F, FortiGate-3100D, FortiGate-3200D, FortiGate-3200F, FortiGate-3201F, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3500F, FortiGate-3501F, FortiGate-3600E, FortiGate-3600E-DC, FortiGate-3601E, FortiGate-3700D, FortiGate-3700F, FortiGate-3701F, FortiGate-3800D, FortiGate-3960E, FortiGate-3980E, FortiGate-4200F, FortiGate-4201F, FortiGate-4400F, FortiGate-4401F, FortiGate-4800F, FortiGate-4801F <b>FortiGate 5000 Series:</b> FortiGate-5001E, FortiGate-5001E1 <b>FortiGate 6000 Series:</b> FortiGate-6000F, FortiGate-6001F, FortiGate-6300F, FortiGate-6300F-DC, FortiGate-6301F, FortiGate-6301F-DC, FortiGate-6500F, FortiGate-6500F-DC, FortiGate-6501F, FortiGate-6501F-DC <b>FortiGate 7000 Series:</b> FortiGate-7000E, FortiGate-7000F, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E, FortiGate-7060E-8-DC, FortiGate-7081F, FortiGate-7081F-DC, FortiGate-7081F-2-DC, FortiGate-7121F, FortiGate-7121F-2, FortiGate-7121F-2-DC, FortiGate-7121F-DC <b>FortiGate DC:</b> FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-1800F-DC, FortiGate-1801F-DC, FortiGate-2201E-ACDC, FortiGate-2600F-DC, FortiGate-2601F-DC, FortiGate-3000D-DC, FortiGate-3000F-DC, FortiGate-3000F-ACDC, FortiGate-3001F-DC, FortiGate-3001F-ACDC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC, FortiGate-4200F-DC, FortiGate-4201F-DC, FortiGate-4400F-DC, FortiGate-4401F-DC <b>FortiWiFi:</b> FWF-40F, FWF-40F-3G4G, FWF-60E, FWF-60E-DSL, FWF-60E-DSLJ, FWF-60F, FWF-61E, FWF-61F, FWF-80F-2R, FWF-81F-2R, FWF-80F-2R-3G4G-DSL, FWF-81F-2R-3G4G-DSL, FWF-81F-2R-3G4G-POE, FWF-81F-2R-POE <b>FortiGate VM:</b> FortiGate-ARM64-AWS, FortiGate-ARM64-Azure, FortiGate-ARM64-GCP, FortiGate-ARM64-KVM, FortiGate-ARM64-OCI, FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-AWS, FortiGate-VM64-Azure, FortiGate-VM64-GCP, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-Xen <b>FortiGate Rugged:</b> FGR-60F, FGR-60F-3G4G, FGR-70F, FGR-70F-3G4G	7.4



Model	Firmware Version
<b>FortiGate:</b> Container-FortiOS, FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-70F, FortiGate-71F, FortiGate-80E, FortiGate-80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90G, FortiGate-91E, FortiGate-91G, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-120G, FortiGate-121G, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300E, FortiGate-301E, FortiGate-400E, FortiGate-400E-Bypass, FortiGate-400F, FortiGate-401E, FortiGate-401F, FortiGate-500E, FortiGate-501E, FortiGate-600E, FortiGate-600F, FortiGate-601E, FortiGate-601F, FortiGate-800D, FortiGate-900D, FortiGate-900G, FortiGate-901G, FortiGate-1000D, FortiGate-1000F, FortiGate-1001F, FortiGate-1100E, FortiGate-1101E, FortiGate-1500D, FortiGate-1500DT, FortiGate-1800F, FortiGate-1801F, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-2600F, FortiGate-2601F, FortiGate-3000D, FortiGate-3000F, FortiGate-3001F, FortiGate-3100D, FortiGate-3200D, FortiGate-3200F, FortiGate-3201F, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3500F, FortiGate-3501F, FortiGate-3600E, FortiGate-3601E, FortiGate-3700D, FortiGate-3700F, FortiGate-3701F, FortiGate-3800D, FortiGate-3960E, FortiGate-3980E, FortiGate-4200F, FortiGate-4201F, FortiGate-4400F, FortiGate-4401F, FortiGate-4800F, FortiGate-4801F <b>FortiGate 5000 Series:</b> FortiGate-5001E, FortiGate-5001E1 <b>FortiGate 6000 Series:</b> FortiGate-6000F, FortiGate-6001F, FortiGate-6300F, FortiGate-6300F-DC, FortiGate-6301F, FortiGate-6301F-DC, FortiGate-6500F, FortiGate-6500F-DC, FortiGate-6501F, FortiGate-6501F-DC <b>FortiGate 7000 Series:</b> FortiGate-7000E, FortiGate-7000F, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E, FortiGate-7060E-8-DC, FortiGate-7081F, FortiGate-7081F-DC, FortiGate-7081F-2-DC, FortiGate-7121F, FortiGate-7121F-2, FortiGate-7121F-2-DC, FortiGate-7121F-DC <b>FortiGate DC:</b> FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-1800F-DC, FortiGate-1801F-DC, FortiGate-2201E-ACDC, FortiGate-2600F-DC, FortiGate-2601F-DC, FortiGate-3000D-DC, FortiGate-3000F-DC, FortiGate-3000F-ACDC, FortiGate-3001F-DC, FortiGate-3001F-ACDC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC, FortiGate-4200F-DC, FortiGate-4201F-DC, FortiGate-4400F-DC, FortiGate-4401F-DC, FortiGate-4800F-DC, FortiGate-4801F-DC <b>FortiWiFi:</b> FWF-60E, FWF-60E-DSL, FWF-60E-DSLJ, FWF-60F, FWF-61E, FWF-61F, FWF-80F-2R, FWF-81F-2R, FWF-81F-2R-3G4G-POE, FWF-81F-2R-POE <b>FortiGate VM:</b> FortiGate-ARM64-AWS, FortiGate-ARM64-Azure, FortiGate-ARM64-GCP, FortiGate-ARM64-KVM, FortiGate-ARM64-OCI, FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-AWS, FortiGate-VM64-Azure, FortiGate-VM64-GCP, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager <b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-HV, FOS-VM64-KVM, FOS-VM64-Xen <b>FortiGate Rugged:</b> FGR-60F, FGR-60F-3G4G, FGR-70F, FGR-70F-3G4G	7.2

Model	Firmware Version
<b>FortiGate:</b> FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-70F, FortiGate-71F, FortiGate-80E, FortiGate-80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-400E, FortiGate-400E-Bypass, FortiGate-400F, FortiGate-401E, FortiGate-401F, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600D, FortiGate-600E, FortiGate-600F, FortiGate-601E, FortiGate-601F, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-1800F, FortiGate-1801F, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-2600F, FortiGate-2601F, FortiGate-3000D, FortiGate-3000F, FortiGate-3001F, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3500F, FortiGate-3501F, FortiGate-3600E, FortiGate-3601E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E, FortiGate-4200F, FortiGate-4201F, FortiGate-4400F, FortiGate-4401F,	7.0
<b>FortiGate 5000 Series:</b> FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1	
<b>FortiGate DC:</b> FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-1800F-DC, FortiGate-1801F-DC, FortiGate-2201E-ACDC, FortiGate-2600F-DC, FortiGate-2601F-DC, FortiGate-3000D-DC, FortiGate-3000F-DC, FortiGate-3000F-ACDC, FortiGate-3001F-DC, FortiGate-3001F-ACDC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC, FortiGate-4200F-DC, FortiGate-4201F-DC, FortiGate-4400F-DC, FortiGate-4401F-DC	
<b>FortiWiFi:</b> FWF-60E, FWF-60E-DSL, FWF-60E-DSLJ, FWF-60F, FWF-61E, FWF-61F, FWF-80F-2R, FWF-81F-2R, FWF-81F-2R-3G4G-POE, FWF-81F-2R-POE	
<b>FortiGate VM:</b> FortiGate-ARM64-AWS, FortiGate-ARM64-KVM, FortiGate-ARM64-OCI, FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-AWS, FortiGate-VM64-Azure, FortiGate-VM64-GCP, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager	
<b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-HV, FOS-VM64-KVM, FOS-VM64-Xen	
<b>FortiGate Rugged:</b> FGR-60F, FGR-60F-3G4G	

Model	Firmware Version
<b>FortiGate:</b> FortiGate-40F, FortiGate-40F-3G4G, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-80E, FortiGate-80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-100D, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-201F, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-400E, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600D, FortiGate-600E, FortiGate-601E, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-1800F, FortiGate-1801F, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-2600F, FortiGate-2601F, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3600E, FortiGate-3601E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E, FortiGate-4200F, FortiGate-4201F, FortiGate-4400F, FortiGate-4401F,	6.4
<b>FortiGate 5000 Series:</b> FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1	
<b>FortiGate DC:</b> FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-1800F-DC, FortiGate-1801F-DC, FortiGate-2201E-ACDC, FortiGate-2600F-DC, FortiGate-2601F-DC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC, FortiGate-4200F-DC, FortiGate-4201F-DC, FortiGate-4400F-DC, FortiGate-4401F-DC	
<b>FortiGate Hardware Low Encryption:</b> FortiGate-100D-LENC	
<b>FortiWiFi:</b> FWF-40F, FWF-40F-3G4G, FWF-60E, FWF-60E-DSL, FWF-60E-DSLJ, FWF-60F, FWF-61E, FWF-61F, FWF-80F-2R, FWF-81F-2R, FWF-81F-2R-3G4G-POE, FWF-81F-2R-POE	
<b>FortiGate VM:</b> FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-ALIONDEMAND, FortiGate-VM64-AWS, FortiGate-VM64-AZUREONDEMAND, FortiGate-VM64-Azure, FortiGate-VM64-GCP, VM64-GCPONDEMAND, FortiGate-VM64-HV, FortiGate-VM64-IBM, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager	
<b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-HV, FOS-VM64-KVM, FOS-VM64-Xen	
<b>FortiGate Rugged:</b> FGR-60F, FGR-60F-3G4G	

Model	Firmware Version
<b>FortiGate:</b> FortiGate-30E, FortiGate-30E-3G4G-GBL, FortiGate-30E-3G4G-INTL, FortiGate-30E-3G4G-NAM, FortiGate-40F, FortiGate-40F-3G4G, FortiGate-50E, FortiGate-51E, FortiGate-52E, FortiGate-60E, FortiGate-60E-DSL, FortiGate-60E-DSLJ, FortiGate-60E-POE, FortiGate-60F, FortiGate-61E, FortiGate-61F, FortiGate-80E, FortiGate-80E-POE, FortiGate-80F, FortiGate-80F-Bypass, FortiGate-80F-POE, FortiGate-81E, FortiGate-81E-POE, FortiGate-81F, FortiGate-81F-POE, FortiGate-90E, FortiGate-91E, FortiGate-92D, FortiGate-100D, FortiGate-100E, FortiGate-100EF, FortiGate-100F, FortiGate-101E, FortiGate-101F, FortiGate-140D, FortiGate-140D-POE, FortiGate-140E, FortiGate-140E-POE, FortiGate-200E, FortiGate-200F, FortiGate-201E, FortiGate-300D, FortiGate-300E, FortiGate-301E, FortiGate-400D, FortiGate-400E, FortiGate-400E-Bypass, FortiGate-401E, FortiGate-500D, FortiGate-500E, FortiGate-501E, FortiGate-600D, FortiGate-600E, FortiGate-601E, FortiGate-800D, FortiGate-900D, FortiGate-1000D, FortiGate-1100E, FortiGate-1101E, FortiGate-1200D, FortiGate-1500D, FortiGate-1500DT, FortiGate-2000E, FortiGate-2200E, FortiGate-2201E, FortiGate-2500E, FortiGate-3000D, FortiGate-3100D, FortiGate-3200D, FortiGate-3300E, FortiGate-3301E, FortiGate-3400E, FortiGate-3401E, FortiGate-3600E, FortiGate-3700D, FortiGate-3800D, FortiGate-3810D, FortiGate-3815D, FortiGate-3960E, FortiGate-3980E <b>FortiGate 5000 Series:</b> FortiGate-5001D, FortiGate-5001E, FortiGate-5001E1 <b>FortiGate DC:</b> FortiGate-401E-DC, FortiGate-800D-DC, FortiGate-1100E-DC, FortiGate-1500D-DC, FortiGate-2201E-ACDC, FortiGate-3000D-DC, FortiGate-3100D-DC, FortiGate-3200D-DC, FortiGate-3400E-DC, FortiGate-3401E-DC, FortiGate-3600E-DC, FortiGate-3700D-DC, FortiGate-3800D-DC, FortiGate-3810D-DC, FortiGate-3815D-DC, FortiGate-3960E-ACDC, FortiGate-3960E-DC, FortiGate-3980E-DC <b>FortiGate Hardware Low Encryption:</b> FortiGate-100D-LENC <b>FortiWiFi:</b> FWF-30E, FWF-30E-3G4G-INTL, FWF-30E-3G4G-NAM, FWF-40F, FWF-40F-3G4G, FWF-50E, FWF-50E-2R, FWF-51E, FWF-60E, FWF-60E-DSL, FWF-60E-DSLJ, FWF-60F, FWF-61E, FWF-61F, FWF-80F-2R, FortiWiFi-80F-2R-3G4G-DSL, FWF-81F-2R, FWF-81F-2R-POE <b>FortiGate VM:</b> FortiGate-VM64, FortiGate-VM64-ALI, FortiGate-VM64-ALIONDEMAND, FortiGate-VM64-AWS, FortiGate-VM64-AWSONDEMAND, FortiGate-VM64-AZUREONDEMAND, FortiGate-VM64-Azure, FortiGate-VM64-GCP, VM64-GCPONDEMAND, FortiGate-VM64-HV, FortiGate-VM64-KVM, FortiGate-VM64-OPC, FortiGate-VM64-RAXONDEMAND, FortiGate-VM64-XEN, FortiGate-VMX-Service-Manager <b>FortiOS-VM:</b> FOS-VM64, FOS-VM64-HV, FOS-VM64-KVM, FOS-VM64-Xen <b>FortiGate Rugged:</b> FGR-30D, FGR-35D, FGR-60F, FGR-60F-3G4G, FGR-90D	6.2

## FortiGate special branch models

The following FortiGate models are released on special branches of FortiOS. FortiAnalyzer version 7.6.1 supports these models on the identified FortiOS version and build number.

For information about supported FortiGate models released with FortiOS firmware, see [FortiGate models on page 30](#).

## FortiOS 7.0

FortiGate Model	FortiOS Version
FortiGate-80F-DSL	7.0.15
FortiGate-90G, FortiGate-91G	7.0.15
FortiGate-120G, FortiGate-121G	7.0.15
FortiGate-900G, FortiGate-901G	7.0.15
FortiGate-1000F, FortiGate-1001F	7.0.15
FortiGate-3200F	7.0.15
FortiGate-3201F	7.0.15
FortiGate-3700F, FortiGate-3701F	7.0.15
FortiGate-4800F, FortiGate-4800F-DC, FortiGate-4801F, FortiGate-4801F-DC	7.0.15
FortiGate-6000F, FortiGate-6001F, FortiGate-6300F, FortiGate-6300F-DC, FortiGate-6301F, FortiGate-6301F-DC, FortiGate-6500F, FortiGate-6500F-DC, FortiGate-6501F, FortiGate-6501F-DC	7.0.15
FortiGate-7000E, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E, FortiGate-7060E-8-DC	7.0.15
FortiGate-7000F, FortiGate-7081F, FortiGate-7081F-DC, FortiGate-7081F-2-DC, FortiGate-7121F, FortiGate-7121F-2, FortiGate-7121F-2-DC, FortiGate-7121F-DC	7.0.15
FortiGateRugged-70F, FortiGateRugged-70F-3G4G	7.0.15
FortiWiFi-50G-5G	7.0.12
FortiWiFi-80F-2R-3G4G-DSL	7.0.15
FortiWiFi-81F-2R-3G4G-DSL	7.0.15

## FortiOS 6.4

FortiGate Model	FortiOS Version
FortiGate-400F, FortiGate-401F	6.4.13
FortiGate-600F, FortiGate-601F	6.4.13
FortiGate-3500F	6.4.6
FortiGate-3501F	6.4.6
FortiGate-6000F, FortiGate-6001F, FortiGate-6300F, FortiGate-6300F-DC, FortiGate-6301F, FortiGate-6301F-DC, FortiGate-6500F, FortiGate-6500F-DC, FortiGate-6501F, FortiGate-6501F-DC	6.4.13

FortiGate Model	FortiOS Version
FortiGate-7000E, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E, FortiGate-7060E-8-DC	6.4.13
FortiGate-7000F, FortiGate-7081F, FortiGate-7081F-DC, FortiGate-7081F-2-DC, FortiGate-7121F, FortiGate-7121F-2, FortiGate-7121F-2-DC, FortiGate-7121F-DC	6.4.13
FortiWiFi-80F-2R-3G4G-DSL, FortiWiFi-81F-2R-3G4G-DSL	6.4.7

## FortiOS 6.2

FortiGate Model	FortiOS Version
FortiGate-80D	6.2.13
FortiGate-200F, FortiGate-201F	6.2.13
FortiGate-1800F, FortiGate-1800F-DC FortiGate-1801F, FortiGate-1801F-DC	6.2.9
FortiGate-2600F, FortiGate-2600F-DC FortiGate-2601F, FortiGate-2601F-DC	6.2.9
FortiGate-4200F, FortiGate-4200F-DC FortiGate-4201F, FortiGate-4201F-DC	6.2.9
FortiGate-4400F, FortiGate-4400F-DC FortiGate-4401F, FortiGate-4401F-DC	6.2.9
FortiGate-6000F, FortiGate-6001F, FortiGate-6300F, FortiGate-6300F-DC, FortiGate-6301F, FortiGate-6301F-DC, FortiGate-6500F, FortiGate-6500F-DC, FortiGate-6501F, FortiGate-6501F-DC	6.2.13
FortiGate-7000E, FortiGate-7030E, FortiGate-7040E, FortiGate-7060E, FortiGate-7060E-8-DC FortiGate-7000F, FortiGate-7081F, FortiGate-7081F-DC, FortiGate-7081F-2-DC, FortiGate-7121F, FortiGate-7121F-2, FortiGate-7121F-2-DC, FortiGate-7121F-DC	6.2.13
FortiWiFi-80F-2R-3G4G-DSL, FortiWiFi-81F-2R-3G4G-DSL	6.2.6

## FortiOS 6.0

FortiGate Model	FortiOS Version
FortiGate-30E-3G4G-GBL	6.0
FortiGate-40F, FortiGate-40F-3G4G	6.0
FortiGate-41F	6.0.6
FortiGate-41F-3G4G	6.0.6

FortiGate Model	FortiOS Version
FortiGate-60F, FortiGate-61F	6.0
FortiGate-100F, FortiGate-101F	6.0
FortiGate-1100E, FortiGate-1100E-DC, FortiGate-1101E	6.0
FortiGate-1800F, FortiGate-1800F-DC FortiGate-1801F, FortiGate-1801F-DC	6.0
FortiGate-2200E, FortiGate-2201E, FortiGate-2201E-ACDC	6.0
FortiGate-3300E, FortiGate-3301E	6.0
FortiWiFi-40F, FortiWiFi-40F-3G4G	6.0
FortiWiFi-41F	6.0.6
FortiWiFi-41F-3G4G	6.0.6
FortiWiFi-60F, FortiWiFi-61F	6.0

## FortiCarrier models

The following FortiCarrier models are released with FortiCarrier firmware.

For information about supported FortiCarrier models on special branch releases of FortiCarrier firmware, see [FortiCarrier special branch models on page 42](#).

Model	Firmware Version
<b>FortiCarrier:</b> FortiCarrier-3000D, FortiCarrier-3000F, FortiCarrier-3001F, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3200F, FortiCarrier-3201F, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3700F, FortiCarrier-3701F, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-4200F, FortiCarrier-4201F, FortiCarrier-4400F, FortiCarrier-4401F, FortiCarrier-4800F, FortiCarrier-4801F <b>FortiCarrier 5000 Series:</b> FortiCarrier-5001E, FortiCarrier-5001E1 <b>FortiCarrier 6000 Series:</b> FortiCarrier-6000F, FortiCarrier-6001F, FortiCarrier-6300F, FortiCarrier-6300F-DC, FortiCarrier-6301F, FortiCarrier-6301F-DC, FortiCarrier-6500F, FortiCarrier-6500F-DC, FortiCarrier-65001F, FortiCarrier-6501F-DC <b>FortiCarrier 7000 Series:</b> FortiCarrier-7000E, FortiCarrier-7000F, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7060E-8-DC, FortiCarrier-7081F, FortiCarrier-7081F-DC, FortiCarrier-7081F-2-DC, FortiCarrier-7121F, FortiCarrier-7121F-2, FortiCarrier-7121F-2-DC, FortiCarrier-7121F-DC <b>FortiCarrier-DC:</b> FortiCarrier-3000D-DC, FortiCarrier-3000F-ACDC, FortiCarrier-3000F-DC, FortiCarrier-3001F-ACDC, FortiCarrier-3001F-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC, FortiCarrier-4200F-DC, FortiCarrier-4201F-DC, FortiCarrier-4400F-DC, FortiCarrier-4401F-DC, FortiCarrier-4800F-DC, FortiCarrier-4801F-DC	7.6

Model	Firmware Version
<b>FortiCarrier-VM:</b> FortiCarrier-ARM64-AWS, FortiCarrier-ARM64-Azure, FortiCarrier-ARM64-GCP, FortiCarrier-ARM64-KVM, FortiCarrier-ARM64-OCI, FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-IBM, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	
<b>FortiCarrier:</b> FortiCarrier-2600F, FortiCarrier-2601F, FortiCarrier-3000D, FortiCarrier-3000F, FortiCarrier-3001F, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3200F, FortiCarrier-3201F, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3700F, FortiCarrier-3701F, FortiCarrier-3800D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-4200F, FortiCarrier-4201F, FortiCarrier-4400F, FortiCarrier-4401F, FortiCarrier-4800F, FortiCarrier-4801F <b>FortiCarrier 5000 Series:</b> FortiCarrier-5001E, FortiCarrier-5001E1 <b>FortiCarrier 6000 Series:</b> FortiCarrier-6000F, FortiCarrier-6001F, FortiCarrier-6300F, FortiCarrier-6300F-DC, FortiCarrier-6301F, FortiCarrier-6301F-DC, FortiCarrier-6500F, FortiCarrier-6500F-DC, FortiCarrier-65001F, FortiCarrier-6501F-DC <b>FortiCarrier 7000 Series:</b> FortiCarrier-7000E, FortiCarrier-7000F, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7060E-8-DC, FortiCarrier-7081F, FortiCarrier-7081F-DC, FortiCarrier-7081F-2-DC, FortiCarrier-7121F, FortiCarrier-7121F-2, FortiCarrier-7121F-2-DC, FortiCarrier-7121F-DC <b>FortiCarrier-DC:</b> FortiCarrier-2600F-DC, FortiCarrier-2601F-DC, FortiCarrier-3000D-DC, FortiCarrier-3000F-DC, FortiCarrier-3000F-ACDC, FortiCarrier-3001F-DC, FortiCarrier-3001F-ACDC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC, FortiCarrier-4200F-DC, FortiCarrier-4201F-DC, FortiCarrier-4400F-DC, FortiCarrier-4401F-DC <b>FortiCarrier-VM:</b> FortiCarrier-ARM64-AWS, FortiCarrier-ARM64-Azure, FortiCarrier-ARM64-GCP, FortiCarrier-ARM64-KVM, FortiCarrier-ARM64-OCI, FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-KVM, FortiCarrier-VM64-IBM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	7.4
<b>FortiCarrier:</b> FortiCarrier-2600F, FortiCarrier-2601F, FortiCarrier-3000D, FortiCarrier-3000F, FortiCarrier-3001F, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3200F, FortiCarrier-3201F, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3700F, FortiCarrier-3701F, FortiCarrier-3800D, FortiCarrier-3960E, FortiCarrier-3980E, FortiCarrier-4200F, FortiCarrier-4201F, FortiCarrier-4400F, FortiCarrier-4401F, FortiCarrier-4800F, FortiCarrier-4801F <b>FortiCarrier 5000 Series:</b> FortiCarrier-5001E, FortiCarrier-5001E1 <b>FortiCarrier 6000 Series:</b> FortiCarrier-6000F, FortiCarrier-6001F, FortiCarrier-6300F, FortiCarrier-6300F-DC, FortiCarrier-6301F, FortiCarrier-6301F-DC, FortiCarrier-6500F, FortiCarrier-6500F-DC, FortiCarrier-65001F, FortiCarrier-6501F-DC	7.2



Model	Firmware Version
<p><b>FortiCarrier 7000 Series:</b> FortiCarrier-7000E, FortiCarrier-7000F, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7060E-8-DC, FortiCarrier-7081F, FortiCarrier-7081F-DC, FortiCarrier-7081F-2-DC, FortiCarrier-7121F, FortiCarrier-7121F-2, FortiCarrier-7121F-2-DC, FortiCarrier-7121F-DC</p> <p><b>FortiCarrier-DC:</b> FortiCarrier-2600F-DC, FortiCarrier-2601F-DC, FortiCarrier-3000D-DC, FortiCarrier-3000F-DC, FortiCarrier-3000F-ACDC, FortiCarrier-3001F-DC, FortiCarrier-3001F-ACDC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC, FortiCarrier-4200F-DC, FortiCarrier-4201F-DC, FortiCarrier-4400F-DC, FortiCarrier-4401F-DC</p> <p><b>FortiCarrier-VM:</b> FortiCarrier-ARM64-AWS, FortiCarrier-ARM64-Azure, FortiCarrier-ARM64-GCP, FortiCarrier-ARM64-KVM, FortiCarrier-ARM64-OCI, FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-IBM, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen</p>	
<p><b>FortiCarrier:</b> FortiCarrier-2600F, FortiCarrier-2601F, FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E</p> <p><b>FortiCarrier 5000 Series:</b> FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1</p> <p><b>FortiCarrier-DC:</b> FortiCarrier-2600F-DC, FortiCarrier-2601F-DC, FortiCarrier-3000D-DC, FortiCarrier-3000F-DC, FortiCarrier-3000F-ACDC, FortiCarrier-3001F-DC, FortiCarrier-3001F-ACDC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC</p> <p><b>FortiCarrier-VM:</b> FortiCarrier-ARM64-AWS, FortiCarrier-ARM64-KVM, FortiCarrier-ARM64-OCI, FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-IBM, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen, FortiCarrier-ARM64-KVM</p>	7.0
<p><b>FortiCarrier:</b> FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3500F, FortiCarrier-3501F, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E</p> <p><b>FortiCarrier 5000 Series:</b> FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1</p> <p><b>FortiCarrier-DC:</b> FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC</p> <p><b>FortiCarrier-VM:</b> FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-IBM, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen</p>	6.4

Model	Firmware Version
<b>FortiCarrier:</b> FortiCarrier-3000D, FortiCarrier-3100D, FortiCarrier-3200D, FortiCarrier-3300E, FortiCarrier-3301E, FortiCarrier-3400E, FortiCarrier-3401E, FortiCarrier-3600E, FortiCarrier-3601E, FortiCarrier-3700D, FortiCarrier-3800D, FortiCarrier-3810D, FortiCarrier-3815D, FortiCarrier-3960E, FortiCarrier-3980E <b>FortiCarrier 5000 Series:</b> FortiCarrier-5001D, FortiCarrier-5001E, FortiCarrier-5001E1 <b>FortiCarrier-DC:</b> FortiCarrier-3000D-DC, FortiCarrier-3100D-DC, FortiCarrier-3200D-DC, FortiCarrier-3400E-DC, FortiCarrier-3401E-DC, FortiCarrier-3600E-DC, FortiCarrier-3700D-DC, FortiCarrier-3800D-DC, FortiCarrier-3810D-DC, FortiCarrier-3815D-DC, FortiCarrier-3960E-DC, FortiCarrier-3980E-DC <b>FortiCarrier 6K and 7K:</b> FortiCarrier-6000F, FortiCarrier-6300F, FortiCarrier-6301F, FortiCarrier-6500F, FortiCarrier-6501F, FortiCarrier-7000E, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7000F, FortiCarrier-7121F, FortiCarrier-7121F-2 <b>FortiCarrier 6K and 7K DC:</b> FortiCarrier-6000F-DC, FortiCarrier-6300F-DC, FortiCarrier-6301F-DC, FortiCarrier-6500F-DC, FortiCarrier-6501F-DC, FortiCarrier-7060E-8-DC, FortiCarrier-7121F-DC, FortiCarrier-7121F-2-DC <b>FortiCarrier-VM:</b> FortiCarrier-VM64, FortiCarrier-VM64-ALI, FortiCarrier-VM64-AWS, FortiCarrier-VM64-Azure, FortiCarrier-VM64-GCP, FortiCarrier-VM64-HV, FortiCarrier-VM64-KVM, FortiCarrier-VM64-OPC, FortiCarrier-VM64-Xen	6.2

## FortiCarrier special branch models

The following FortiCarrier models are released on special branches of FortiOS Carrier. FortiAnalyzer version 7.6.1 supports these models on the identified FortiOS Carrier version and build number.

For information about supported FortiCarrier models released with FortiOS Carrier firmware, see [FortiCarrier models on page 39](#).

### FortiCarrier 7.0

FortiCarrier Model	FortiCarrier Version
FortiCarrier-3200F	7.0.15
FortiCarrier-3201F	7.0.15
FortiCarrier-3700F, FortiCarrier-3701F	7.0.15
FortiCarrier-4800F, FortiCarrier-4800F-DC, FortiCarrier-4801F, FortiCarrier-4801F-DC	7.0.15
FortiCarrier-6000F, FortiCarrier-6001F, FortiCarrier-6300F, FortiCarrier-6300F-DC, FortiCarrier-6301F, FortiCarrier-6301F-DC, FortiCarrier-6500F, FortiCarrier-6500F-DC, FortiCarrier-65001F, FortiCarrier-6501F-DC	7.0.15
FortiCarrier-7000E, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7060E-8-DC	7.0.15
FortiCarrier-7000F, FortiCarrier-7081F, FortiCarrier-7081F-DC, FortiCarrier-7081F-2-DC, FortiCarrier-7121F, FortiCarrier-7121F-2, FortiCarrier-7121F-2-DC, FortiCarrier-7121F-DC	7.0.15

## FortiCarrier 6.4

FortiCarrier Model	FortiCarrier Version
FortiCarrier-3500F	6.4.6
FortiCarrier-3501F	6.4.6
FortiCarrier-6000F, FortiCarrier-6001F, FortiCarrier-6300F, FortiCarrier-6300F-DC, FortiCarrier-6301F, FortiCarrier-6301F-DC, FortiCarrier-6500F, FortiCarrier-6500F-DC, FortiCarrier-65001F, FortiCarrier-6501F-DC	6.4.13
FortiCarrier-7000E, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7060E-8-DC	6.4.13
FortiCarrier-7000F, FortiCarrier-7081F, FortiCarrier-7081F-DC, FortiCarrier-7081F-2-DC, FortiCarrier-7121F, FortiCarrier-7121F-2, FortiCarrier-7121F-2-DC, FortiCarrier-7121F-DC	6.4.13

## FortiCarrier 6.2

FortiCarrier Model	FortiCarrier Version
FortiCarrier-4200F, FortiCarrier-4200F-DC FortiCarrier-4201F, FortiCarrier-4201F-DC FortiCarrier-4400F, FortiCarrier-4400F-DC, FortiCarrier-4401F, FortiCarrier-4401F-DC	6.2.9
FortiCarrier-6000F, FortiCarrier-6001F, FortiCarrier-6300F, FortiCarrier-6300F-DC, FortiCarrier-6301F, FortiCarrier-6301F-DC, FortiCarrier-6500F, FortiCarrier-6500F-DC, FortiCarrier-65001F, FortiCarrier-6501F-DC	6.2.13
FortiCarrier-7000E, FortiCarrier-7030E, FortiCarrier-7040E, FortiCarrier-7060E, FortiCarrier-7060E-8-DC FortiCarrier-7000F, FortiCarrier-7081F, FortiCarrier-7081F-DC, FortiCarrier-7081F-2-DC, FortiCarrier-7121F, FortiCarrier-7121F-2, FortiCarrier-7121F-2-DC, FortiCarrier-7121F-DC	6.2.13

## FortiCarrier 6.0

FortiCarrier Model	FortiCarrier Version
FortiCarrier-VM64-Azure	6.0

## FortiADC models

Model	Firmware Version
<b>FortiADC:</b> FortiADC-100F, FortiADC-120F, FortiADC-200D, FortiADC-200F, FortiADC-220F, FortiADC-300D, FortiADC-300F, FortiADC-400D, FortiADC-400F, FortiADC-700D, FortiADC-1000F, FortiADC-1200F, FortiADC-1500D, FortiADC-2000D, FortiADC-2000F, FortiADC-2200F, FortiADC-4000D, FortiADC-4000F, FortiADC-4200F, FortiADC-5000F <b>FortiADC VM:</b> FortiADC-VM	7.1, 7.2, 7.4

## FortiAnalyzer models

Model	Firmware Version
<b>FortiAnalyzer:</b> FortiAnalyzer-150G, FortiAnalyzer-300F, FortiAnalyzer-300G, FortiAnalyzer-400E, FortiAnalyzer-800F, FortiAnalyzer-800G, FortiAnalyzer-810G, FortiAnalyzer-1000F, FortiAnalyzer-2000E, FortiAnalyzer-3000F, FortiAnalyzer-3000G, FortiAnalyzer-3500F, FortiAnalyzer-3500G, FortiAnalyzer-3510G, FortiAnalyzer-3700F, FortiAnalyzer-3700G, FortiAnalyzer-3900E <b>FortiAnalyzer VM:</b> FortiAnalyzer-DOCKER, FortiAnalyzer-VM64, FortiAnalyzer-VM64-ALI, FortiAnalyzer-VM64-AWS, FortiAnalyzer-VM64-AWS-OnDemand, FortiAnalyzer-VM64-Azure, FortiAnalyzer-VM64-Azure-OnDemand, FortiAnalyzer-VM64-GCP, FortiAnalyzer-VM64-HV, FortiAnalyzer-VM64-IBM, FortiAnalyzer-VM64-KVM, FortiAnalyzer-VM64-OPC, FortiAnalyzer-VM64-Xen	7.4
<b>FortiAnalyzer:</b> FortiAnalyzer-150G, FortiAnalyzer-300F, FortiAnalyzer-300G, FortiAnalyzer-400E, FortiAnalyzer-800F, FortiAnalyzer-800G, FortiAnalyzer-810G, FortiAnalyzer-1000F, FortiAnalyzer-2000E, FortiAnalyzer-3000E, FortiAnalyzer-3000F, FortiAnalyzer-3000G, FortiAnalyzer-3500E, FortiAnalyzer-3500F, FortiAnalyzer-3500G, FortiAnalyzer-3510G, FortiAnalyzer-3700F, FortiAnalyzer-3700G, FortiAnalyzer-3900E <b>FortiAnalyzer VM:</b> FortiAnalyzer-DOCKER, FortiAnalyzer-VM64, FortiAnalyzer-VM64-ALI, FortiAnalyzer-VM64-AWS, FortiAnalyzer-VM64-AWS-OnDemand, FortiAnalyzer-VM64-Azure, FortiAnalyzer-VM64-Azure-OnDemand, FortiAnalyzer-VM64-GCP, FortiAnalyzer-VM64-HV, FortiAnalyzer-VM64-IBM, FortiAnalyzer-VM64-KVM, FortiAnalyzer-VM64-OPC, FortiAnalyzer-VM64-Xen	7.2
<b>FortiAnalyzer:</b> FortiAnalyzer-150G, FortiAnalyzer-200F, FortiAnalyzer-300F, FortiAnalyzer-300G, FortiAnalyzer-400E, FortiAnalyzer-800F, FortiAnalyzer-800G, FortiAnalyzer-810G, FortiAnalyzer-1000F, FortiAnalyzer-2000E, FortiAnalyzer-3000E, FortiAnalyzer-3000F, FortiAnalyzer-3000G, FortiAnalyzer-3500E, FortiAnalyzer-3500F, FortiAnalyzer-3500G, FortiAnalyzer-3700F, FortiAnalyzer-3700G, FortiAnalyzer-3900E <b>FortiAnalyzer VM:</b> FortiAnalyzer-DOCKER, FortiAnalyzer-VM64, FortiAnalyzer-VM64-ALI, FortiAnalyzer-VM64-ALI-OnDemand, FortiAnalyzer-VM64-AWS, FortiAnalyzer-VM64-Azure, FortiAnalyzer-VM64-Azure-OnDemand, FortiAnalyzer-VM64-GCP, FortiAnalyzer-VM64-GCP-OnDemand, FortiAnalyzer-VM64-HV, FortiAnalyzer-VM64-IBM, FortiAnalyzer-VM64-KVM, FortiAnalyzer-VM64-OPC, FortiAnalyzer-VM64-Xen	7.0

## FortiAuthenticator models

Model	Firmware Version
<b>FortiAuthenticator:</b> FAC-200E, FAC-300F, FAC-400E, FAC-800F, FAC-2000E, FAC-3000E, FAC-3000F <b>FortiAuthenticator VM:</b> FAC-VM	6.6
<b>FortiAuthenticator:</b> FAC-200E, FAC-300F, FAC-400E, FAC-800F, FAC-2000E, FAC-3000E, FAC-3000F <b>FortiAuthenticator VM:</b> FAC-VM	6.5
<b>FortiAuthenticator:</b> FAC-200D, FAC-200E, FAC-300F, FAC-400C, FAC-400E, FAC-800F, FAC-1000C, FAC-1000D, FAC-2000E, FAC-3000D, FAC-3000E, FAC-3000F <b>FortiAuthenticator VM:</b> FAC-VM	6.4
<b>FortiAuthenticator:</b> FAC-200D, FAC-200E, FAC-300F, FAC-400C, FAC-400E, FAC-800F, FAC-1000C, FAC-1000D, FAC-2000E, FAC-3000D, FAC-3000E <b>FortiAuthenticator VM:</b> FAC-VM	6.3

## FortiCache models

Model	Firmware Version
<b>FortiCache:</b> FCH-400C, FCH-400E, FCH-1000C, FCH-1000D, FCH-3000C, FCH-3000D, FCH-3000E, FCH-3900E <b>FortiCache VM:</b> FCH-KVM, FCH-VM64	4.1, 4.2
<b>FortiCache:</b> FCH-400C, FCH-400E, FCH-1000C, FCH-1000D, FCH-3000C, FCH-3000D, FCH-3900E <b>FortiCache VM:</b> FCH-VM64	4.0

## FortiDDoS models

Model	Firmware Version
<b>FortiDDoS:</b> FortiDDoS-200F, FortiDDoS-1500F, FortiDDoS-2000F, FortiDDoS-3000F <b>FortiDDoS VM:</b> FortiDDoS-VM	7.0
<b>FortiDDoS:</b> FortiDDoS-200F, FortiDDoS-1500F, FortiDDoS-2000F, FortiDDoS-3000F <b>FortiDDoS VM:</b> FortiDDoS-VM	6.6
<b>FortiDDoS:</b> FortiDDoS-200F, FortiDDoS-1500F, FortiDDoS-2000F, FortiDDoS-3000F <b>FortiDDoS VM:</b> FortiDDoS-VM	6.5
<b>FortiDDoS:</b> FortiDDoS-200F, FortiDDoS-1500F, FortiDDoS-2000F, FortiDDoS-3000F <b>FortiDDoS VM:</b> FortiDDoS-VM	6.4

Model	Firmware Version
<b>FortiDDoS:</b> FortiDDoS-200F, FortiDDoS-1500F, FortiDDoS-2000F <b>FortiDDoS VM:</b> FortiDDoS-VM	6.3

## FortiDeceptor models

Model	Firmware Version
<b>FortiDeceptor:</b> FDC-100G, FDC-1000F, FDC-1000G <b>FortiDeceptor Rugged:</b> FDCR-100G <b>FortiDeceptor VM:</b> FDC-VM	5.0, 5.1, 5.2, 5.3
<b>FortiDeceptor:</b> FDC-1000F, FDC-1000G <b>FortiDeceptor Rugged:</b> FDCR-100G <b>FortiDeceptor VM:</b> FDC-VM	4.3

## FortiFirewall models

Some of the following FortiFirewall models are released on special branches of FortiFirewall firmware. FortiAnalyzer version 7.6.1 supports these models on the identified FortiFirewall firmware version and build number.

Model	Firmware Version
<b>FortiFirewall:</b> FortiFirewall-1801F, FortiFirewall-2600F, FortiFirewall-3001F, FortiFirewall-3501F, FortiFirewall-3980E, FortiFirewall-4200F, FortiFirewall-4400F, FortiFirewall-4401F, FortiFirewall-4801F <b>FortiFirewall DC:</b> FortiFirewall-3980E-DC, FortiFirewall-4200F-DC, FortiFirewall-4400F-DC, FortiFirewall-4401F-DC <b>FortiFirewall-VM:</b> FortiFirewall-VM64, FortiFirewall-VM64-KVM	7.6
<b>FortiFirewall:</b> FortiFirewall-1801F, FortiFirewall-2600F, FortiFirewall-3001F, FortiFirewall-3501F, FortiFirewall-3980E, FortiFirewall-4200F, FortiFirewall-4400F, FortiFirewall-4401F, FortiFirewall-4801F <b>FortiFirewall DC:</b> FortiFirewall-3980E-DC, FortiFirewall-4200F-DC, FortiFirewall-4400F-DC, FortiFirewall-4401F-DC <b>FortiFirewall-VM:</b> FortiFirewall-VM64, FortiFirewall-VM64-KVM	7.4
<b>FortiFirewall:</b> FortiFirewall-3980E, FortiFirewall-4200F, FortiFirewall-4400F, FortiFirewall-4401F, FortiFirewall-4801F <b>FortiFirewall DC:</b> FortiFirewall-4200F-DC, FortiFirewall-4401F-DC <b>FortiFirewall-VM:</b> FortiFirewall-VM64, FortiFirewall-VM64-KVM	7.2
<b>FortiFirewall:</b> FortiFirewall-3980E <b>FortiFirewall DC:</b> FortiFirewall-3980E-DC <b>FortiFirewall-VM:</b> FortiFirewall-VM64, FortiFirewall-VM64-KVM	7.0

## FortiFirewall special branch models

Model	Firmware Version	Firmware Build (for special branch)
<b>FortiFirewall:</b> FortiFirewall-3001F	7.0.10	4955
<b>FortiFirewall:</b> FortiFirewall-3501F	7.0.10	4955

## FortiFirewallCarrier models

Some of the following FortiFirewallCarrier models are released on special branches of FortiFirewallCarrier firmware. FortiAnalyzer version 7.6.1 supports these models on the identified FortiFirewallCarrier firmware version and build number.

Model	Firmware Version
<b>FortiFirewallCarrier:</b> FortiFirewallCarrier-3001F, FortiFirewallCarrier-3501F, FortiFirewallCarrier-3980E, FortiFirewallCarrier-4200F, FortiFirewallCarrier-4400F, FortiFirewallCarrier-4401F, FortiFirewallCarrier-4801F <b>FortiFirewallCarrier DC:</b> FortiFirewallCarrier-4200F-DC, FortiFirewallCarrier-4401F-DC <b>FortiFirewallCarrier-VM:</b> FortiFirewallCarrier-VM64, FortiFirewallCarrier-VM64-KVM	7.6
<b>FortiFirewallCarrier:</b> FortiFirewallCarrier-1801F, FortiFirewallCarrier-2600F, FortiFirewallCarrier-3001F, FortiFirewallCarrier-3501F, FortiFirewallCarrier-3980E, FortiFirewallCarrier-4200F, FortiFirewallCarrier-4400F, FortiFirewallCarrier-4401F, FortiFirewallCarrier-4801F <b>FortiFirewallCarrier DC:</b> FortiFirewallCarrier-1801F-DC, FortiFirewallCarrier-4200F-DC, FortiFirewallCarrier-4401F-DC <b>FortiFirewallCarrier-VM:</b> FortiFirewallCarrier-VM64, FortiFirewallCarrier-VM64-KVM	7.4
<b>FortiFirewallCarrier:</b> FortiFirewallCarrier-2600F, FortiFirewallCarrier-3980E, FortiFirewallCarrier-4200F, FortiFirewallCarrier-4400F, FortiFirewallCarrier-4801F <b>FortiFirewallCarrier DC:</b> FortiFirewallCarrier-4200F-DC <b>FortiFirewallCarrier-VM:</b> FortiFirewallCarrier-VM64, FortiFirewallCarrier-VM64-KVM	7.2
<b>FortiFirewallCarrier-VM:</b> FortiFirewallCarrier-VM64, FortiFirewallCarrier-VM64-KVM	7.0

## FortiFirewall special branch models

Model	Firmware Version	Firmware Build
<b>FortiFirewallCarrier:</b> FortiFirewallCarrier-1801F, FortiFirewallCarrier-4401F	7.2.6	4609
<b>FortiFirewallCarrier:</b> FortiFirewallCarrier-3001F	7.0.10	4955
<b>FortiFirewallCarrier:</b> FortiFirewallCarrier-3501F	7.0.10	4940

## Fortisolator models

Model	Firmware Version
<b>Fortisolator:</b> Fortisolator-1000F, Fortisolator-1000G, Fortisolator-3000F	2.4
<b>Fortisolator-VM:</b> Fortisolator-VM	

## FortiMail models

Model	Firmware Version
<b>FortiMail:</b> FE-200F, FE-400F, FE-900F, FE-2000E, FE-2000F, FE-3000E, FE-3000F, FE-3200E	7.4
<b>FortiMail VM:</b> FML-VM, FortiMail Cloud	
<b>FortiMail:</b> FE-60D, FE-200D, FE-200E, FE-200F, FE-400E, FE-400F, FE-900F, FE-2000E, FE-2000F, FE-3000E, FE-3000F, FE-3200E	7.2
<b>FortiMail VM:</b> FML-VM, FortiMail Cloud	
<b>FortiMail:</b> FE-60D, FE-200D, FE-200E, FE-200F, FE-400E, FE-400F, FE-900F, FE-1000D, FE-2000E, FE-2000F, FE-3000D, FE-3000E, FE-3000F, FE-3200E	7.0
<b>FortiMail VM:</b> FML-VM, FortiMail Cloud	

## FortiNAC models

Model	Firmware Version
<b>FortiNAC:</b> FortiNAC-500, FortiNAC-600, FortiNAC-700, FortiNAC-C-1000C, FortiNAC-C-2000C, FortiNAC-Manager-550	9.4
<b>FortiNAC VM:</b> FortiNAC-C-VM, FortiNAC-CA-VM, FortiNAC-M-VM	
<b>FortiNAC:</b> FortiNAC-500, FortiNAC-600, FortiNAC-700, FortiNAC-C-1000C, FortiNAC-C-2000C, FortiNAC-Manager-550	9.1, 9.2
<b>FortiNAC VM:</b> FortiNAC-C-VM, FortiNAC-CA-VM, FortiNAC-M-VM	
<b>FortiNAC:</b> FortiNAC-CA-500F, FortiNAC-M-550F, FortiNAC-CA-600F, FortiNAC-CA-700F	7.4
<b>FortiNAC VM:</b> FortiNAC-VM-ESXI, FortiNAC-MX-VM	
<b>FortiNAC:</b> FortiNAC-CA-500F, FortiNAC-M-550F, FortiNAC-CA-600F, FortiNAC-CA-700F	7.2
<b>FortiNAC VM:</b> FortiNAC-F-VM, FortiNAC-VM-ESXI, FortiNAC-MX-VM	

## FortiNDR models

Model	Firmware Version
<b>FortiNDR:</b> FAI-1000F, FAI-3500F	7.2, 7.4



Model	Firmware Version
<b>FortiNDR-VM:</b> FAI-KVM, FAI-VM	
<b>FortiNDR:</b> FAI-3500F <b>FortiNDR-VM:</b> FAI-KVM, FAI-VM	7.0, 7.1

## FortiPAM models

Model	Firmware Version
<b>FortiPAM:</b> FortiPAM-1000G, FortiPAM-3000G <b>FortiPAM VM:</b> FortiPAM-AWS, FortiPAM-Azure, FortiPAM-GCP, FortiPAM-HyperV, FortiPAM-KVM, FortiPAM-VM64	1.0, 1.1

## FortiProxy models

Model	Firmware Version
<b>FortiProxy:</b> FPX-400E, FPX-400G, FPX-2000E, FPX-2000G, FPX-4000E, FPX-4000G <b>FortiProxy VM:</b> FortiProxy-AliCloud, FortiProxy-AWS, FortiProxy-Azure, FortiProxy-GCP, FortiProxy-HyperV, FortiProxy-KVM, FortiProxy-VM64	7.0, 7.2, 7.4
<b>FortiProxy:</b> FPX-400E, FPX-2000E, FPX-4000E <b>FortiProxy VM:</b> FortiProxy-KVM, FortiProxy-VM64	1.0, 1.1, 1.2, 2.0

## FortiSandbox models

Model	Firmware Version
<b>FortiSandbox:</b> FSA-500F, FSA-500G, FSA-1000D, FSA-1000F, FSA-1500G, FSA-2000E, FSA-3000D, FSA-3000E, FSA-3000F, FSA-3500D <b>FortiSandbox DC:</b> FSA-1000F-DC <b>FortiSandbox-VM:</b> FortiSandbox-AWS, FortiSandbox-Cloud, FSA-VM	4.2, 4.4
<b>FortiSandbox:</b> FSA-500F, FSA-1000D, FSA-1000F, FSA-2000E, FSA-3000D, FSA-3000E, FSA-3000F, FSA-3500D <b>FortiSandbox DC:</b> FSA-1000F-DC <b>FortiSandbox-VM:</b> FortiSandbox-AWS, FortiSandbox-Cloud, FSA-VM	4.0
<b>FortiSandbox:</b> FSA-500F, FSA-1000D, FSA-1000F, FSA-2000E, FSA-3000D, FSA-3000E, FSA-3500D <b>FortiSandbox DC:</b> FSA-1000F-DC <b>FortiSandbox-VM:</b> FortiSandbox-AWS, FSA-VM	3.2

## FortiSOAR models

Model	Firmware Version
<b>FortiSOAR VM:</b> FortiSOAR-VM	7.2, 7.3, 7.4

## FortiSwitch ATCA models

Model	Firmware Version
<b>FortiController:</b> FTCL-5103B, FTCL-5903C, FTCL-5913C	5.2
<b>FortiSwitch-ATCA:</b> FS-5003A, FS-5003B <b>FortiController:</b> FTCL-5103B	5.0
<b>FortiSwitch-ATCA:</b> FS-5003A, FS-5003B	4.3

## FortiWeb models

Model	Firmware Version
<b>FortiWeb:</b> FortiWeb-100D, FortiWeb-100E, FortiWeb-100F, FortiWeb-400C, FortiWeb-400D, FortiWeb-400E, FortiWeb-400F, FortiWeb-600D, FortiWeb-600E, FortiWeb-600F, FortiWeb-1000D, FortiWeb-1000E, FortiWeb-1000F, FortiWeb-2000E, FortiWeb-2000F, FortiWeb-3000C, FortiWeb-3000CFSX, FortiWeb-3000D, FortiWeb-3000DFSX, FortiWeb-3000E, FortiWeb-3000F, FortiWeb-3010E, FortiWeb-4000C, FortiWeb-4000D, FortiWeb-4000E, FortiWeb-4000F <b>FortiWeb VM:</b> FortiWeb-Azure, FortiWeb-Azure_OnDemand, FortiWeb-Docker, FortiWeb-GCP, FortiWeb-GCP_OnDemand, FortiWeb-HyperV, FortiWeb-VM, FortiWeb-XENOpenSource, FortiWeb-XENServer	7.4
<b>FortiWeb:</b> FortiWeb-100D, FortiWeb-100E, FortiWeb-400C, FortiWeb-400D, FortiWeb-400E, FortiWeb-600D, FortiWeb-600E, FortiWeb-1000D, FortiWeb-1000E, FortiWeb-1000F, FortiWeb-2000E, FortiWeb-2000F, FortiWeb-3000C, FortiWeb-3000CFSX, FortiWeb-3000D, FortiWeb-3000DFSX, FortiWeb-3000E, FortiWeb-3000F, FortiWeb-3010E, FortiWeb-4000C, FortiWeb-4000D, FortiWeb-4000E, FortiWeb-4000F <b>FortiWeb VM:</b> FortiWeb-Azure, FortiWeb-Azure_OnDemand, FortiWeb-Docker, FortiWeb-GCP, FortiWeb-GCP_OnDemand, FortiWeb-HyperV, FortiWeb-VM, FortiWeb-XENOpenSource, FortiWeb-XENServer	7.2
<b>FortiWeb:</b> FortiWeb-100D, FortiWeb-100E, FortiWeb-400C, FortiWeb-400D, FortiWeb-400E, FortiWeb-600D, FortiWeb-600E, FortiWeb-1000D, FortiWeb-1000E, FortiWeb-2000E, FortiWeb-2000F, FortiWeb-3000C, FortiWeb-3000CFSX, FortiWeb-3000D, FortiWeb-3000DFSX, FortiWeb-3000E, FortiWeb-3000F, FortiWeb-3010E, FortiWeb-4000C, FortiWeb-4000D, FortiWeb-4000E, FortiWeb-4000F <b>FortiWeb VM:</b> FortiWeb-Azure, FortiWeb-Azure_OnDemand, FortiWeb-Docker, FortiWeb-GCP, FortiWeb-GCP_OnDemand, FortiWeb-HyperV, FortiWeb-VM, FortiWeb-XENOpenSource, FortiWeb-XENServer	7.0

## Resolved Issues

To inquire about a particular bug, please contact [Customer Service & Support](#).

## Known issues

Known issues are organized into the following categories:

- [New known issues on page 52](#)
- [Existing known issues on page 52](#)

To inquire about a particular bug or to report a bug, please contact [Fortinet Customer Service & Support](#).

## New known issues

No new issues have been identified in version 7.6.1.

## Existing known issues

The following issues have been identified in a previous version of FortiAnalyzer and remain in FortiAnalyzer 7.6.1.

### Fabric View

Bug ID	Description
1078817	The "FortiClient EMS Cloud" Fabric Connector (existing/newly added) may not function properly, causing FortiAnalyzer to potentially fail in establishing a successful connection with the "FortiClient EMS Cloud" due to this issue.

### FortiView

Bug ID	Description
954542	When the time range is extensive, FortiAnalyzer may experience limitations in handling data points, resulting in potential omissions of data entries in the final results for <i>FortiView</i> > <i>SD-WAN Monitors</i> widgets.
989446	<i>FortiView</i> SD-WAN Bandwidth Overview displays no data.
1050052	In some cases, the compromised host entry may display different FSSO users and source IPs than the actual users and source IPs on the drill-down page.

## Log View

Bug ID	Description
1058278	<p>The Preview under the Chart Builder displays "No record found". Dataset is saved but chart is not saved.</p> <p><b>Workaround:</b></p> <p>Charts needed to be manually created by using the saved dataset.</p>

## Others

Bug ID	Description
1053830	<p>MEAs cannot be enabled from FortiAnalyzer's GUI.</p> <p><b>Workaround:</b></p> <p>Use the following CLI command to enable them (in this example, universalconnector):</p> <pre>config system docker   set status enable   set universalconnector enable end</pre>
1060337	<p>The log insertion might be interrupted if FortiAnalyzer is upgraded directly from version (7.4.0/7.4.1) to 7.6.0/7.6.1.</p> <p><b>Workaround:</b></p> <p>To avoid this issue, upgrade the FortiAnalyzer to 7.4.2/7.4.3 first and then go to the 7.6.0/7.6.1. For more details please visit the FortiAnalyzer Upgrade Guide.</p>
1062128	<p>After upgrading to the latest available build, the FortiAnalyzer GUI displays the warning message: "A new firmware version is available".</p>
1064103	<p>The "siemdb" daemon may fail to start on a FortiAnalyzer VM running version 7.6.0, which can prevent log migration from completing. This issue may occur due to inconsistencies in the number of CPUs reported by the system during initialization. Certain CPU-related settings might trigger this problem. For more details, see <a href="#">Special Notices on page 10</a>.</p>

## Reports

Bug ID	Description
895106	Top destination by bandwidth dataset does not exclude long-live session.
937700	Source IP on the Report is shown as the Victim in the default Security Analysis report.

## System Settings

Bug ID	Description
766197	An admin user limited to a device group can view all device's log
1027547	<p>In certain cases (currently under investigation), the License Status on FortiAnalyzer may be incorrectly displayed as "Expired" despite the license being active in the account.</p> <p><b>Workaround:</b></p> <p>Restart the FortiAnalyzer when feasible.</p>

# Appendix A - Default and maximum number of ADOMs supported

This section identifies the supported number of ADOMs for FortiAnalyzer hardware models and virtual machines.

See also the [FortiAnalyzer Data Sheet](#).

## Hardware models

FortiAnalyzer supports a default number of ADOMs based on hardware model.

Some hardware models support an ADOM subscription license. When you purchase an ADOM subscription license, you increase the number of supported ADOMs. For example, you can purchase an ADOM subscription license for the FAZ-3000G series, which allows you to use up to a maximum of 1200 ADOMs.

Other hardware models do not support the ADOM subscription license. For hardware models that do not support the ADOM subscription license, the default and maximum number of ADOMs is the same.

FortiAnalyzer Platform	Default number of ADOMs	ADOM license support?	Maximum number of ADOMs
Desktop models	1		1
150G Series	3		3
300F/300G and 400E Series	25		25
800F/800G and 1000F Series	50		50
2000E Series	250		250
3000F Series	500		500
3000G Series	500	✓	1200
3500F	500		500
3500G	500	✓	500
3700F Series	1200		1200
3700G Series	1200	✓	10,000

## Virtual Machines



For subscription licenses, FortiAnalyzer enforces the ADOM limits.  
For perpetual licenses, ADOM limits are recommended, but not enforced.

### FortiAnalyzer subscription license

Five (5) ADOMs are included with FortiAnalyzer VM subscription licenses. Additional ADOMs can be purchased with an ADOM subscription license.

### FortiAnalyzer perpetual license

Recommended maximum number of ADOMs supported:

FortiAnalyzer Platform	Default number of ADOMs
1 GB/Day < License <= 5 GB/Day	10
5 GB/Day < License <= 25 GB/Day	25
25 GB/Day < License <= 100 GB/Day	50
100 GB/Day < License <= 500 GB/Day	250
500 GB/Day < License <= 1000 GB/Day	500
1000 GB/Day < License <= 5000 GB/Day	800
License > 5000 GB/Day	1200



- FortiAnalyzer-VM subscription licenses are fully stackable.
- For FortiAnalyzer-VM perpetual licenses, only the GB/Day is stackable.





[www.fortinet.com](http://www.fortinet.com)

Copyright© 2024 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's Chief Legal Officer, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.